

# MPI-800-NS331

NETWORK TESTING—OPTICAL



## Features/Benefits

- Helps ensure good transmission in ultra-long-haul networks
- Measurement range of  $-55$  dB to  $-20$  dB
- All-in-one: an MPI meter, a power meter and a light source in a single unit
- Flexible: available with various ITU-specified sources in the C and L bands

Next-Generation Network Assessment

**EXFO**  
EXPERTISE REACHING OUT

überreicht durch:

**Opternus**

Opternus GmbH Optische Spleiss- & Messtechnik

Bahnhofstr. 5  
D-22941 Bargteheide

Tel. +49(0)4532-20 44-0  
Fax +49(0)4532-20 44-25

E-Mail: [Info@Opternus.de](mailto:Info@Opternus.de) - [www.Opternus.de](http://www.Opternus.de)

Büro Süd:

Wäldenbronner Str. 2  
D-73732 Esslingen

Tel. +49(0)711-3 10 59 99-0  
Fax +49(0)711-3 10 59 99-99

# Measuring Multipath Interference in Raman-Amplified Networks

Quality of service and uptime are keystones of the deployment and maintenance of any fiber-optic network. Operators constantly focus on optimizing the former and maximizing the latter—which, in the case of next-generation networks that use distributed Raman amplification, can be threatened by the presence of multipath interference (MPI).

MPI is created by the transmitted signal and its amplified reflections reaching the receiver with an important delay, causing the bit error rate to increase. Measuring it at each critical point (Raman amplifiers, receivers, etc.) along the network is therefore an essential step toward ensuring first-class network services.

Enter EXFO's MPI-800-NS331 Multipath Interference Meter, the only portable MPI measurement instrument on the market today. It combines a detector and a DFB light source, providing accurate MPI results in the  $-55$  to  $-20$  dB range. The MPI-800-NS331 offers three operating modes and packs an MPI meter, a power meter and a light source in a single unit, making it the ideal tool for characterizing fiber and system components in the field.




MPI-800-NS331

## KEY FEATURES

- Fast, compact and easy-to-use
- Measurement range of  $-55$  to  $-20$  dB, with an accuracy of  $\pm 0.7$  dB
- Available with various ITU-specified sources in the C and L bands
- DFB laser source delivering adjustable output power over the  $-11.5$  to  $1$  dBm range
- Convenient: transmitter and receiver combined in one lightweight instrument
- All-in-one: an MPI meter, a power meter and a light source for complete fiber and system components characterization
- Detection of ASE noise to prevent incorrect interpretation of results

# Multipath Interference (MPI) Affects Transmission Quality

In fiber-optic links that include reflective connections, a small portion of the transmitted light can bounce between connectors and reach the receiver significantly later than light following the direct path. If the link uses distributed Raman amplification, these reflections are even amplified along the way.

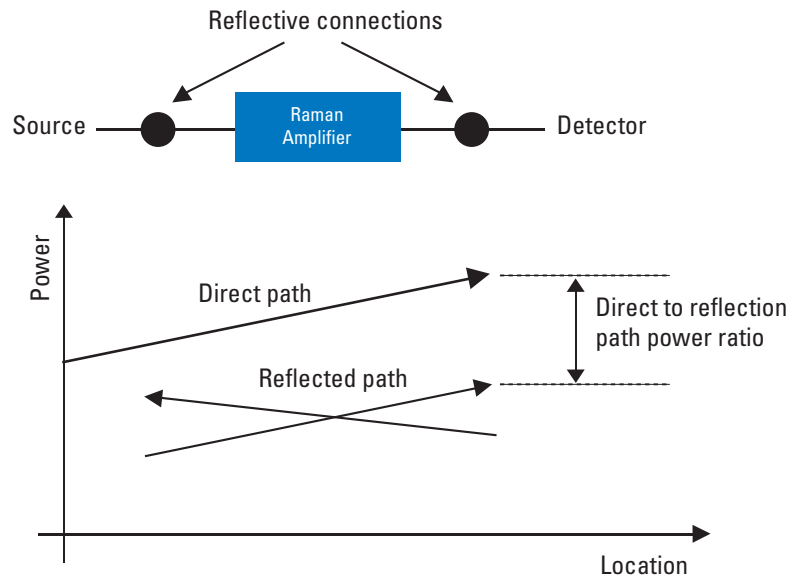

The ratio of the direct path to the reflected path is called multipath interference (MPI). With high MPI—as is often the case with Raman amplification—comes substantial interference, causing increased bit error rate.

## The Concept Behind EXFO's MPI-800-NS331

The MPI-800-NS331 provides accurate assessment of the MPI level by using its low-noise DFB light source to simulate the transmitted signal and its photodiode detector to measure intensity noise over a given frequency. What's more, it combines the light source and the detector in the same unit, making it the obvious choice for complete fiber and system components characterization in the field.

## A Field-Proven Design

EXFO's MPI-800-NS331 Multipath Interference Meter was designed to provide technicians with a portable, rugged and convenient solution to their installation and maintenance needs.

- **Portable:** The compact, handheld MPI-800-NS331 is powered by a battery that offers an autonomy of 20 hours.
- **Rugged:** The MPI-800-NS331's tough shell and rubber bumpers enable it to easily survive splashes, knocks and temperature extremes.
- **Convenient:** The built-in transmitter/receiver combination eliminates the need to worry about the Tx or Rx when characterizing a long-haul link; the all-in-one MPI-800-NS331 simplifies component and fiber characterization in the field.

## SPECIFICATIONS

### MPI meter specifications

Measurement range (dB)	-20 to -55
Uncertainty <sup>a, b, c</sup> (dB)	± 0.7
Power range for MPI measurement (dBm)	6 to -10
Display resolution (dB)	0.01

### Power meter specifications

Measurement range (dBm)	6 to -50
Calibrated wavelengths (nm):	1310, 1500, 1510, 1520, 1530, 1540, 1550, 1560, 1570, 1580, 1590, 1600, 1610, 1620, 1630.
DC power uncertainty <sup>a, d</sup> (dB)	± 0.5
Linearity (typical) <sup>e</sup> (dB)	± 0.1 (4 dBm to -30 dBm)
Display resolution (dB)	0.01 (> -35 dBm) 0.1 (-35 dBm to -44 dBm) 1 (-44 dBm to -50 dBm)

### Optical source specifications

Source type	DFB
Wavelength uncertainty <sup>a</sup> (pm)	± 10
Wavelength stability for 15 min, 1 h, 7 h <sup>e</sup> (pm)	± 2.2
Output power (dBm)	-11.5 to 1
Output power stability for 15 min <sup>a, e</sup> (dB)	± 0.02
Output power stability for 7 h <sup>a, e</sup> (dB)	± 0.06

#### Notes

- At 23 °C ± 1 °C
- After offset nulling
- Using the source of the MPI meter and for back reflection less than -30 dB.
- For a FC/APC connector that has a loss of less than 0.2 dB.
- The stability is expressed as ± half the difference between the maximum and minimum values measured during the period.

## GENERAL SPECIFICATIONS

Display refresh rate	2 Hz	
Temperature		
operating	0 °C to 40 °C	(32 °F to 104 °F)
storage	-40 °C to 70 °C	(-40 °F to 158 °F)
Weight	1.0 kg	(2.2 lb)
Size (H x W x D)	23.5 cm x 12.5 cm x 6.7 cm (9 1/4 in x 4 15/16 in x 2 5/8 in)	
Autonomy <sup>a</sup> (h)	20	
Charge time <sup>a</sup> (h)	4	
Battery type	Li-ion	

## STANDARD ACCESSORIES

Standard accessories include Instruction Manual, AC adapter/charger, built-in rechargeable Li-ion batteries pack, carrying case, protective holster, shoulder strap and Certificate of Calibration

## LASER SAFETY

21 CFR 1040.10	CLASS 1 Laser Product
IEC 60825-1	CLASS 1 Laser Product

## ORDERING INFORMATION

### MPI-800-NS331-XX

#### Model

MPI-800-NS331 = MPI meter with ITU wavelength 1599.320 nm

#### Connector

EA-EUI-28 = UPC/DIN 47256  
EA-EUI-89 = FC narrow key  
EA-EUI-91 = SC  
EA-EUI-95 = E-2000

EXFO Corporate Headquarters > 400 Godin Avenue, Quebec City (Quebec) G1M 2K2 CANADA | Tel.: +1 418 683-0211 | Fax: +1 418 683-2170 | info@EXFO.com

Toll-free: +1 800 663-3936 (USA and Canada) | [www.EXFO.com](http://www.EXFO.com)

EXFO America	3701 Plano Parkway, Suite 160	Plano, TX 75075 USA	Tel.: +1 800 663-3936	Fax: +1 972 836-0164
EXFO Asia	151 Chin Swee Road, #03-29 Manhattan House	SINGAPORE 169876	Tel.: +65 6333 8241	Fax: +65 6333 8242
EXFO China	No. 88 Fuhua First Road Central Tower, Room 801, Futian District	Shenzhen 518048 P. R. CHINA	Tel.: +86 (755) 8203 2300	Fax: +86 (755) 8203 2306
	Beijing New Century Hotel Office Tower, Room 1754-1755 No. 6 Southern Capital Gym Road	Beijing 100044 P. R. CHINA	Tel.: +86 (10) 6849 2738	Fax: +86 (10) 6849 2662
EXFO Europe	Omega Enterprise Park, Electron Way	Chandlers Ford, Hampshire S053 4SE ENGLAND	Tel.: +44 2380 246810	Fax: +44 2380 246801
EXFO Service Assurance	285 Mill Road	Chelmsford, MA 01824 USA	Tel.: +1 978 367-5600	Fax: +1 978 367-5700

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit [www.EXFO.com/recycle](http://www.EXFO.com/recycle). Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to the EXFO website at <http://www.EXFO.com/specs>

In case of discrepancy, the Web version takes precedence over any printed literature.