

# FTB-5500B/FTB-5800

NETWORK TESTING—OPTICAL

## Polarization Mode Dispersion Analyzer—FTB-5500B


- Less than five-second testing time for any PMD range
- No auto-correlation peak, for enhanced accuracy
- NIST traceable
- Ideal for aerial fibers
- Patented design\*: test through EDFAs
- 100 Gbit/s-ready

## Chromatic Dispersion Analyzer—FTB-5800\*\*

- Complete CD characterization
- Highly accurate phase-shift method
- No communication between source and receiver
- Patented design\*: test through EDFAs
- 100 Gbit/s-ready

## Platform Compatibility

- FTB-500 Platform

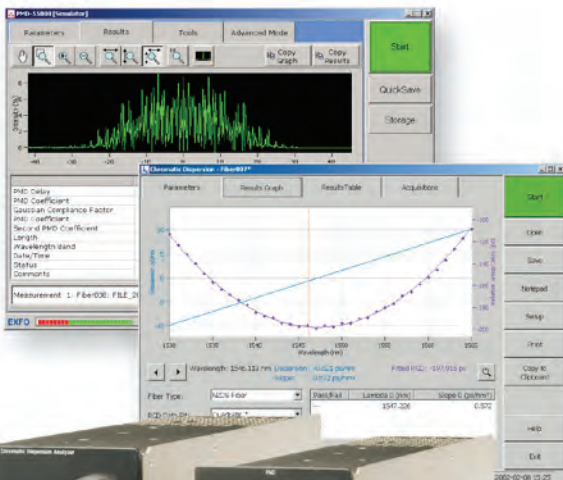

\* Protected by US patent 7,227,645 and equivalents in several other countries. Measurement method approved by TIA-FOTP-124A.

\*\* Protected by US patent 6,429,929 and foreign equivalents.

Next-Generation Network Assessment



überreicht durch:  
**Opternus**

Opternus GmbH Optische Spleiss- & Messtechnik  
Bahnhofstr. 5  
D-22941 Bargtheide  
Tel. +49(0)4532-20 44-0  
Fax +49(0)4532-20 44-25

Büro Süd:  
Wäldenbronner Str. 2  
D-73732 Esslingen  
Tel. +49(0)711-3 10 59 99-0  
Fax +49(0)711-3 10 59 99-99

E-Mail: [info@opternus.de](mailto:info@opternus.de) - [www.opternus.de](http://www.opternus.de) - [www.opternus-shop.de](http://www.opternus-shop.de)

## Combining CD and PMD for Precise Link Characterization

Designed for ultra-long-haul and 40 Gbit/s applications, EXFO's FTB-5500B PMD and FTB-5800 CD analyzer combo provides you with the speed, accuracy and high performance you need to ensure high-quality network services. Housed in the expert FTB-500 Platform, the FTB-5500B and FTB-5500 test modules survive splashes, knocks and drops—ideal for CO and field conditions.



EXFO's CD and PMD analyzers, housed in the FTB-500 platform

## Measuring Polarization Mode Dispersion the Fast Way

Polarization mode dispersion (PMD) represents a significant danger to both legacy and newly deployed networks. And as systems of 10 Gbit/s and faster develop, PMD concern and awareness continue to grow. EXFO's FTB-5500B PMD Analyzer helps you get ahead in the field. Whether you need to verify the capacity of legacy fiber or upgrade a network to any speed, the modular FTB-5500B is fast, reliable and ready to go.



FTB-5500B PMD Analyzer

### Key Features

- Five-second testing time
- No auto-correlation peak
- Testing through EDFAs
- Suitable for all networks

### Key Benefits

- Test more fiber, faster
- Ultra-high accuracy
- Reduce test cost
- Future-proof: 100 Gbit/s-ready, designed for long-haul and ultra-long-haul networks

### Second-Order PMD

Particularly important in multichannel transmission and as rates reach 40 Gbit/s and higher, second-order PMD is derived from the measured PMD value. EXFO's software provides second-order PMD delay and coefficient values for telecom fibers. These values allow you to characterize fibers and cables more precisely than simple PMD and better control the transmission quality of high-speed systems.

## Characterizing Chromatic Dispersion in the Field

The ongoing race to develop high-speed transmission systems and to increase available bandwidth is facing certain limitations. Chromatic dispersion (CD) measurements are becoming more and more critical for carriers and service providers looking to improve their systems by upgrading to extreme speed. EXFO's FTB-5800 CD Analyzer offers high performance in a field-ready unit for all chromatic dispersion testing situations.



■ FTB-5800 CD Analyzer

### Key Features

Personalized data management  
Phase-shift method  
Testing through EDFAs  
Suitable for all networks

### Key Benefits


Generate clear, customized report  
Ultra-high accuracy  
Reduce test cost  
Future-proof: 100 Gbit/s-ready, designed for long-haul, ultra-long-haul and WDM networks

# Powerful Software Features at the Touch of a Button


EXFO's ToolBox software suite runs the FTB-500's test module applications. The user-friendly touchscreen provides easy access to menus and functions, for highly productive, yet simple testing in the field.

## Set and test.

Simple test setup parameters for error-free testing.

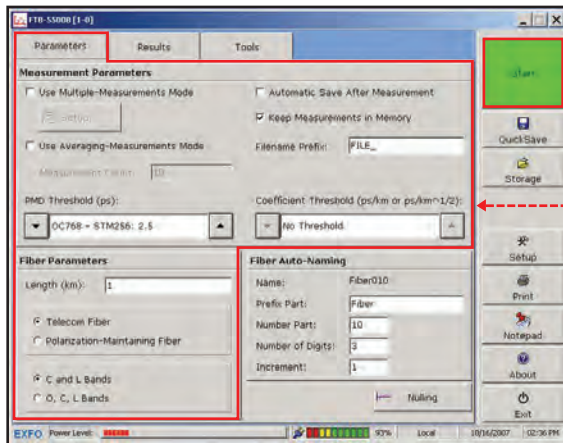

FTB-5500B PMD Analyzer

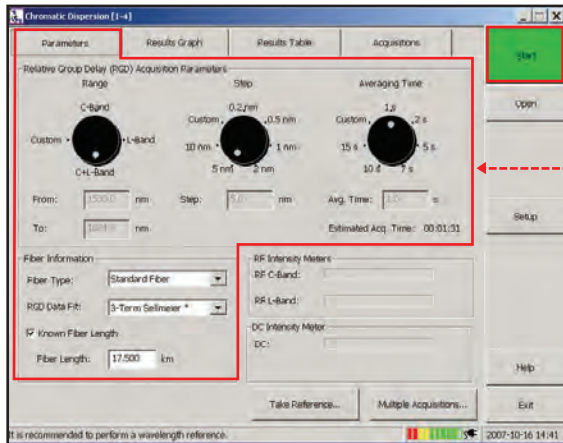

FTB-5800 CD Analyzer

**SET**

- Measurement parameters
- Fiber parameters

**TEST**

# Powerful Software Features at the Touch of a Button (Cont'd)

Personalized data management for clear, customized report creation.

## Benefit from statistical analysis

- Averaging multiple test on one fiber
- Gathering data from end-to-end fibers and calculating total PMD (link creation)

The screenshot shows the FTB-5500B software interface. At the top, there are tabs for Parameters, Results, and Tools. Below the tabs is a graph showing Intensity (%) on the y-axis (ranging from 0 to 30) and Delay (ps) on the x-axis (ranging from -2 to 2). The graph displays a noisy signal. Below the graph is a table of results:

Parameter	Results
PMD Value	0.785 ps
PMD Coefficient	0.7851 ps/km <sup>1/2</sup>
Gaussian Compliance Factor	1.069
Second order PMD	0.2771 ps/nm ( 0.3559 ps <sup>2</sup> )
Second PMD Coefficient	0.2771 ps/nm.km ( 0.3559 ps <sup>2</sup> .km )
Length	1.000 km
Wavelength Band	1514.62-1586.66 nm
Date/Time	2003-04-16 10:23:53
Status	Valid
Comments	Random coupling fiber measured in telecom mode with C b...

Annotations with red dashed lines point to specific features:

- PMD value** and **PMD coefficient** point to the top two rows of the results table.
- Second-order PMD and coefficient** point to the next two rows of the results table.
- Pass/fail threshold** points to a green 'Pass' button at the bottom right of the results table.

Large graphic display of both the dispersion and the relative group delay.

## Benefit from statistical analysis

- Multiple measurement capabilities for testing over long time periods
- Threshold detection for dispersion and slope

The screenshot shows the FTB-5800 Chromatic Dispersion software interface. At the top, there are tabs for Parameters, Results Graph, Results Table, and Acquisitions. Below the tabs is a graph showing Dispersion (ps/nm.km) on the left y-axis (ranging from 0 to 30) and Relative Group Delay (ps) on the right y-axis (ranging from -25000 to 140000) against Wavelength (nm) on the x-axis (ranging from 1530 to 1620). The graph displays two curves: a blue curve for Dispersion and a purple curve for Relative Group Delay. Below the graph is a table of results:

Wavelength (nm)	Dispersion	Relative Group Delay	Dispersion Slope	Dispersion Slope Error
1530.0	0.00	26.401	26.401	1236.664
1530.5	627.03	645.443	18.412	1239.178
1531.0	1236.36	1289.699	46.300	1241.690
1531.5	1854.32	1937.131	32.945	1244.399
1532.0	2463.25	2590.899	26.511	1246.707
1532.5	3091.03	3233.898	-40.811	1249.213
1533.0	3736.18	3799.870	22.890	1251.717
1533.5	4378.82	4388.554	6.839	1254.119
1534.0	4987.35	5013.388	-28.898	1256.118
1534.5	5623.04	5642.271	19.258	1258.215
1535.0	6262.90	6272.503	8.607	1261.711

Annotations with red dashed lines point to specific features:

- Calculated CD curve** points to the purple curve in the graph.
- Group delay curve FIT** points to the blue curve in the graph.
- Fiber type** points to the 'Fiber Type' dropdown menu in the bottom left of the interface, which is set to 'Standard Fiber'.


## Additional PMD and CD Combo Advantages

### The Ultra-Long-Haul Advantage

Now you can test whole links instead of only sections, reducing manipulation, error and testing time. Because filtering is done at the receiver end and not at the source, transmission through one-way devices such as isolators and EDFAs is possible. Tests have been performed through as many as 250 cascaded amplifiers over a link length of more than 12 000 km.

### The FLS-5800 CD/PMD Analyzer Source Advantage

A single light source, the FLS-5800 CD/PMD Analyzer Source, can help you characterize CD and PMD—reducing testing time and minimizing the potential for human error.

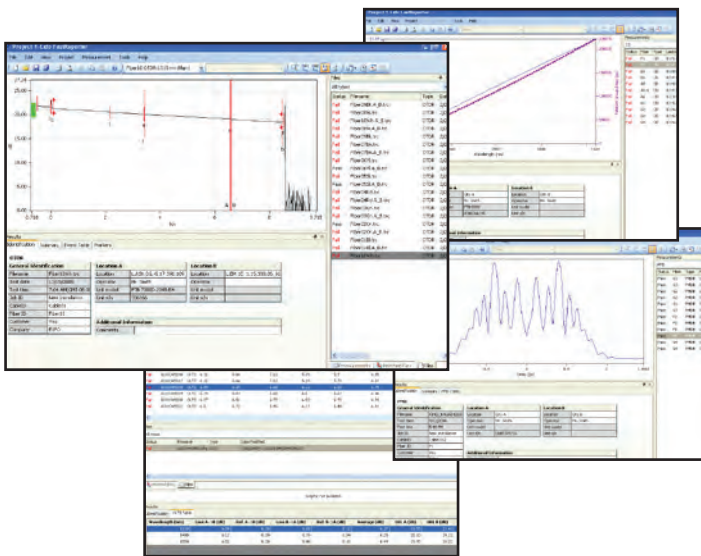

### Fast-Track Data Post-Processing with FastReporter Software

The optional FastReporter software package provides you with the post-processing tools and functionalities you need to optimize your test cycles, whatever the application. Designed for off-line analysis of field-acquired data, FastReporter offers a truly intuitive graphical user interface, which contributes to boosting productivity.

### Flexible Reporting

Choose from various report templates, including PMD, CD and fiber characterization. Generate comprehensive cable reports in PDF, Excel or HTML format.

### FTB-5500B PMD Analyzer

#### SPECIFICATIONS

Wavelength range (nm)	1260 to 1675 (O to U band)	
Measurement range (ps)	0 to 115	
Sensitivity <sup>a</sup> (dBm)	-45	
Measuring time (s)	4.5 (for any PMD value)	
Absolute uncertainty (strong mode coupling) <sup>b</sup> (ps)	± (0.020 + 2 % of PMD)	
Allows measurement through EDFA	Yes (above 120 EDFAs)	

#### Notes

- a. Typical, for C band. May be increased with averaging. With the FLS-5800, the typical dynamic range is 47 dB.  
b. For C band, assuming averaging over all states of polarization.

#### GENERAL SPECIFICATIONS

Temperature	operating	0 °C to 40 °C	(32 °F to 104 °F)
	storage	-40 °C to 70 °C	(-40 °F to 158 °F)
Relative humidity	0 % to 93 % non-condensing		
Size (H x W x D) (module only)	9.6 cm x 7.6 cm x 26.0 cm	(3 3/4 in x 3 in x 10 1/4 in)	
Weight (module only)	1.5 kg (3.4 lb)		

### FTB-5800 CD Analyzer

#### SPECIFICATIONS<sup>a</sup>

Wavelength range (nm)	1530 to 1625 1200 to 1700 <sup>b</sup>			
Wavelength step (nm)	Minimum	0.1		
Measurement points	Maximum	950, user-definable		
Dynamic range <sup>c</sup> (dB)	42			
Wavelength uncertainty <sup>d</sup> (accuracy) (nm)	0.1			
Dispersion uncertainty <sup>d</sup> (accuracy) (ps/nm)	20 km of G.652	1.6		
	120 km of G.652	3.1		
	20 km of G.655	1.9 (guaranteed)		
Dispersion repeatability <sup>d</sup> (ps/nm)		20 km	80 km	120 km
		0.04	0.2	1.1
	Zero-dispersion wavelength $\lambda_0$ repeatability <sup>d</sup> (nm)	0.1	0.14	0.8
	Dispersion slope repeatability $\lambda_0^d$ (%)	0.03	0.05	0.25
Minimum fiber length (km)	< 1			
Maximum fiber length <sup>e</sup> (km)	> 5400			
Measurement time per point <sup>e</sup> (s)	Minimum	< 1		

#### Notes

- a. All specifications are typical with four seconds averaging time per point (where applicable), at a temperature of 23 °C ± 1 °C, with FC connectors and after warmup time.  
b. Displayed range. Values may be extrapolated.  
c. Dynamic range is defined as the difference between the strongest signal and the weakest signal the receiver can detect. Extra averaging may be required. Uncertainty (accuracy) is not guaranteed at limits of range.  
d. C+L band.  
e. Including EDFAs.  
f. Additional gain setting time may be required prior to the first point of each band.

#### GENERAL SPECIFICATIONS

Size (H x W x D) (module)	9.6 cm x 10 cm x 26 cm	(3 3/4 in x 3 15/16 in x 10 1/4 in)
Weight (module)	2 kg	(4.5 lb)

**ORDERING INFORMATION**

**PMD ANALYZER**

**FTB-5500B-XX**

**Connector \* ■**

- EI-EUI-28 = UPC/DIN 47256
- EI-EUI-76 = UPC/HMS-10/AG
- EI-EUI-89 = UPC/FC narrow key
- EI-EUI-90 = UPC/ST
- EI-EUI-91 = UPC/SC

- EI-EUI-95 = UPC/E-2000
- EA-EUI-28 = APC/DIN 47256
- EA-EUI-89 = APC/FC narrow key
- EA-EUI-91 = APC/SC
- EA-EUI-95 = APC/E-2000

Example: FTB-5500B-EI-EUI-89

**CD ANALYZER**

**FTB-5800-XX**

**Connector ■**

- EI-EUI-28 = UPC/DIN 47256
- EI-EUI-76 = UPC/HMS-10/AG
- EI-EUI-89 = UPC/FC narrow key
- EI-EUI-90 = UPC/ST
- EI-EUI-91 = UPC/SC
- EI-EUI-95 = UPC/E-2000

- EA-EUI-28 = APC/DIN 47256
- EA-EUI-89 = APC/FC narrow key
- EA-EUI-91 = APC/SC
- EA-EUI-95 = APC/E-2000

Example: FTB-5800-EI-EUI-89

**CD/PMD ANALYZER SOURCE**

**FLS-5834A-XX**

**Model ■**

FLS-5834A = 1550 nm and 1625 nm

**Connector ■**

- EI-EUI-28 = UPC/DIN 47256
- EI-EUI-76 = UPC/HMS-10/AG (EI only)
- EI-EUI-89 = UPC/FC narrow key
- EI-EUI-90 = UPC/ST (EI only)
- EI-EUI-91 = UPC/SC
- EI-EUI-95 = UPC/E-2000
- EA-EUI-28 = APC/DIN 47256
- EA-EUI-89 = APC/FC narrow key
- EA-EUI-91 = APC/SC
- EA-EUI-95 = APC/E-2000

Example: FLS-5834A-EI-EUI-89

\* EXFO Universal Interface is protected by US patent 6,612,750.

**POLARIZED LIGHT SOURCE (PMD TESTING ONLY)**

**FLS-110-XXP-XX**

**Model ■**

FLS-110-02P = 1310 nm LED  
FLS-110-03P = 1550 nm LED

**Connector \* ■**

- 58 = FC/APC narrow key
- 89 = FC/UPC narrow key
- 91 = SC/UPC
- EI-EUI-28 = UPC/DIN 47256
- EI-EUI-76 = UPC/HMS-10/A
- EI-EUI-89 = UPC/FC narrow key
- EI-EUI-90 = UPC/ST
- EI-EUI-91 = UPC/SC
- EI-EUI-95 = UPC/E-2000
- EA-EUI-28 = APC/DIN 47256
- EA-EUI-89 = APC/FC narrow key
- EA-EUI-91 = APC/SC
- EA-EUI-95 = APC/E-2000

Example: FLS-110-02P-EI-EUI-89

**SAFETY**

FLS-110	THIS PRODUCT COMPLIES WITH 21 CFR 1040.10 AND 1040.11, AND WITH IEC 60825-1:1993+A1:1997.	CLASS 1 LED PRODUCT
FLS-5834A	IEC 60825-1:2001	CLASS 1M LED PRODUCT

EXFO Corporate Headquarters > 400 Godin Avenue, Quebec City (Quebec) G1M 2K2 CANADA | Tel.: +1 418 683-0211 | Fax: +1 418 683-2170 | info@EXFO.com

Toll-free: +1 800 663-3936 (USA and Canada) | [www.EXFO.com](http://www.EXFO.com)

<b>EXFO America</b>	3701 Plano Parkway, Suite 160	Plano, TX 75075 USA	Tel.: +1 800 663-3936	Fax: +1 972 836-0164
<b>EXFO Asia</b>	100 Beach Road, #22-01/03 Shaw Tower	SINGAPORE 189702	Tel.: +65 6333 8241	Fax: +65 6333 8242
<b>EXFO China</b>	36 North, 3 <sup>rd</sup> Ring Road East, Dongcheng District Room 1207, Tower C, Global Trade Center	Beijing 100013 P. R. CHINA	Tel.: +86 10 5825 7755	Fax: +86 10 5825 7722
<b>EXFO Europe</b>	Omega Enterprise Park, Electron Way	Chandlers Ford, Hampshire S053 4SE ENGLAND	Tel.: +44 2380 246810	Fax: +44 2380 246801
<b>EXFO NetHawk</b>	Elektronikkatie 2	FI-90590 Oulu, FINLAND	Tel.: +358 (0)403 010 300	Fax: +358 (0)8 564 5203
<b>EXFO Service Assurance</b>	270 Billerica Road	Chelmsford, MA 01824 USA	Tel.: +1 978 367-5600	Fax: +1 978 367-5700

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit [www.EXFO.com/recycle](http://www.EXFO.com/recycle). Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to the EXFO website at <http://www.EXFO.com/specs>

In case of discrepancy, the Web version takes precedence over any printed literature.

SPFTB5500B/5800.3AN

© 2011 EXFO Inc. All rights reserved.



Printed in Canada 11/04



überreicht durch:



Opternus GmbH Optische Spleiss- & Messtechnik

Bahnhofstr. 5  
D-22941 Bargteheide

Tel. +49(0)4532-20 44-0  
Fax +49(0)4532-20 44-25

Büro Süd:

Wäldenbronner Str. 2  
D-73732 Esslingen

Tel. +49(0)711-3 10 59 99-0  
Fax +49(0)711-3 10 59 99-99

E-Mail: [info@opternus.de](mailto:info@opternus.de) - [www.opternus.de](http://www.opternus.de) - [www.opternus-shop.de](http://www.opternus-shop.de)