





Core Alignment Fusion splicer 90S+ kit



ACTIVE FUSION
CONTROL TECHNOLOGY

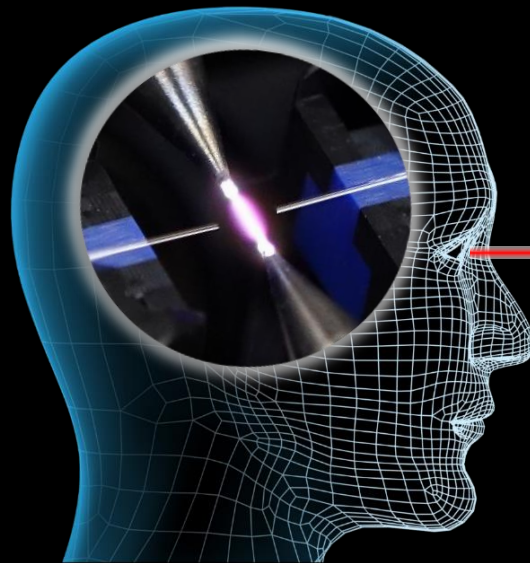

ACTIVE BLADE
MANAGEMENT TECHNOLOGY

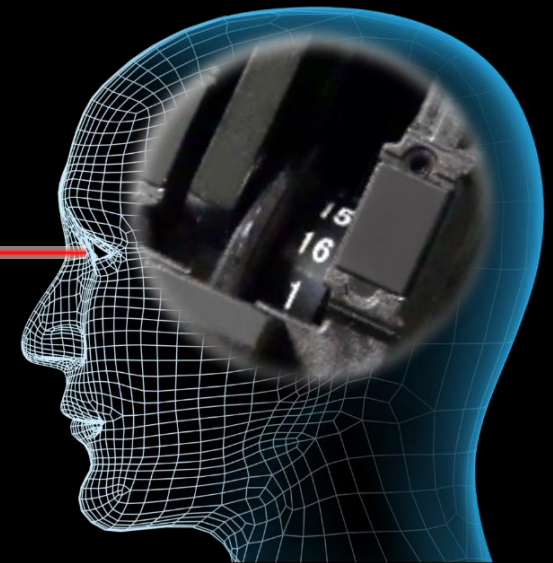


Enhanced Splice Quality



Fujikura


Active Fusion Control Technology




ACTIVE FUSION CONTROL TECHNOLOGY

1. Active Fusion control by cleave condition

One of main causes of high splice loss is bad cleave end face. The 90S+ analyzes the condition of both L and R cleave end faces and performs optimal fusion control. This new technology improves splice loss significantly and reduces the risk of re-installation.

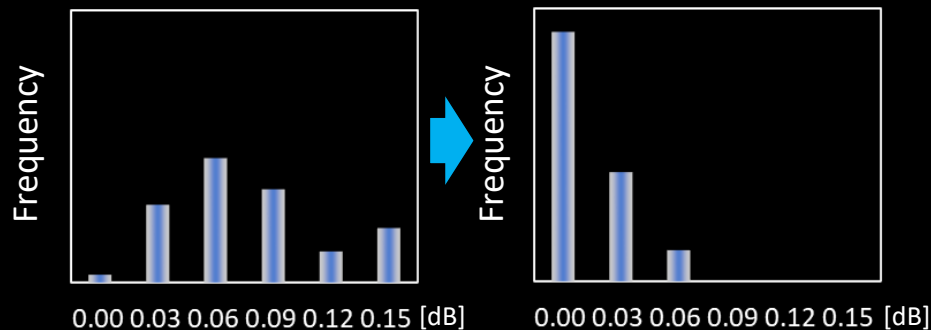


Splice loss with large cleave angle : $3 < \theta < 5$ degree

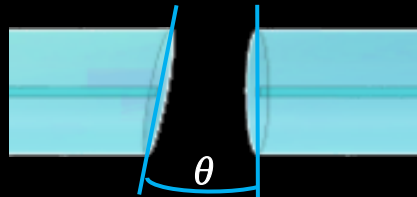

*G.652 splicing result measured with a cut-back method. The splicing result changes depending on the fiber type and fiber characteristics.


2. Active Fusion control by fiber brightness

Fusion is easily affected by changes in the environment. The 90S+ uses real-time fusion parameter control by analyzing the fiber's brightness intensity during fusion. It contributes to stable, reduced splice loss.

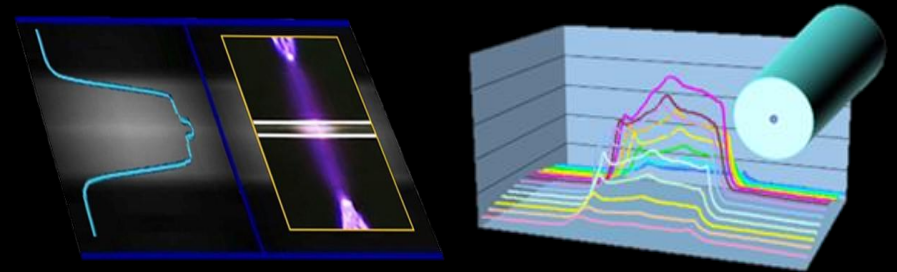


3. Active Fusion control by fiber discrimination

Adequate splice parameters may differ depending on fiber type. The 90S+ automatically applies the optimum splice parameters depending on the fiber type.

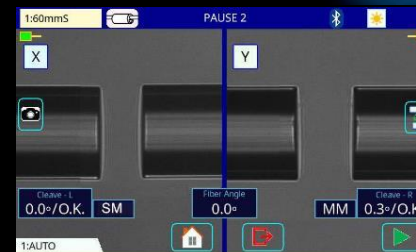


Left:G.652-Right:G.651

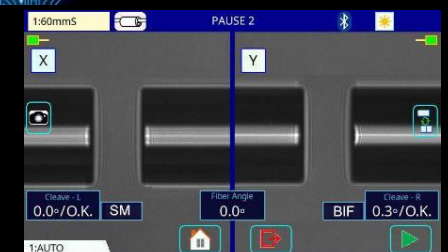

Left:G.652-Right:G.657


Active Blade Management Technology



ACTIVE BLADE MANAGEMENT TECHNOLOGY


1. Active Blade rotation by motor

The 90S+ and CT50 fiber cleaver are enabled with wireless data connectivity. This capability allows automatic cleaver blade rotation when the 90S+ judges the blade is worn. The 90S+ can connect to two CT50s simultaneously.

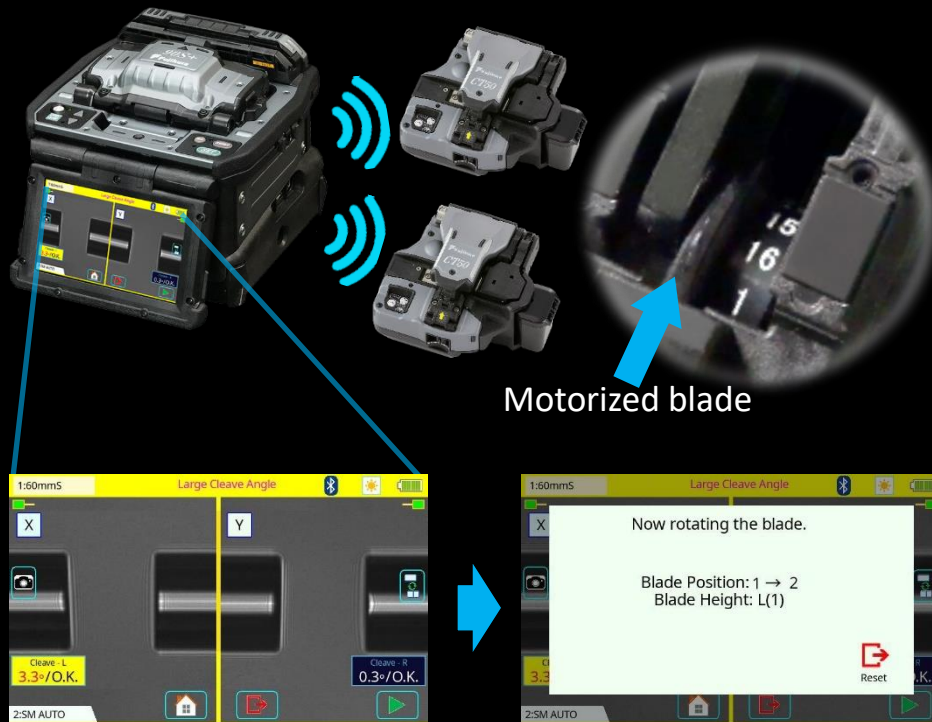

2. Active Blade life management


The 90S+ displays the remaining blade life and informs the user when a blade height change, position change, or new blade is required.

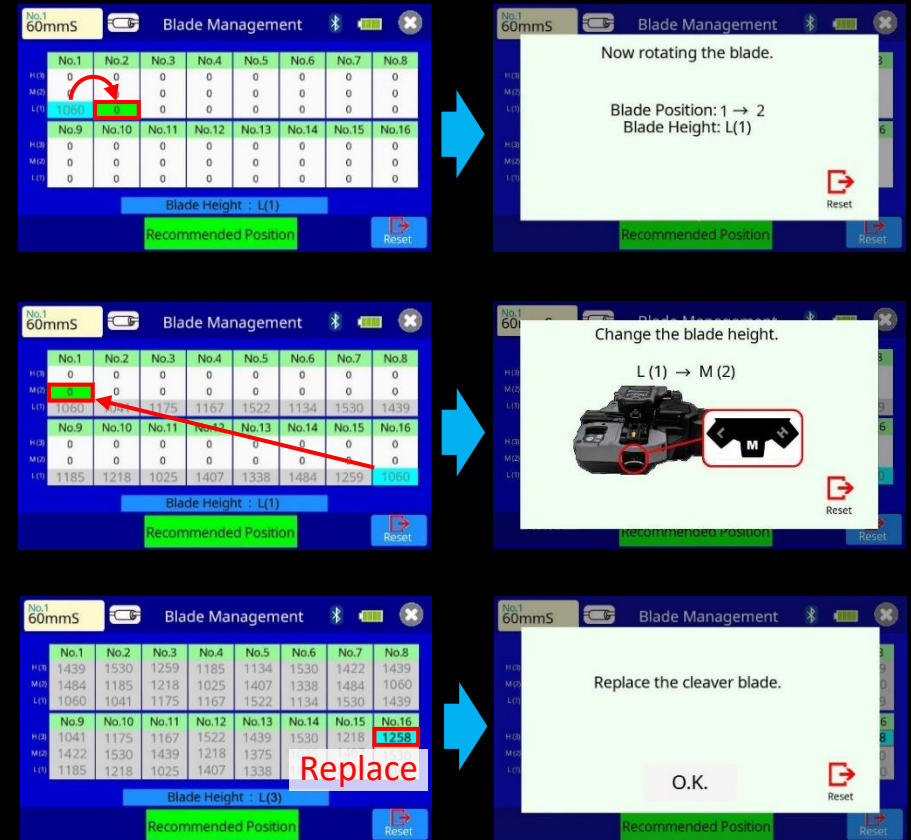

Enhanced Splice Quality

The below graphs show the number of cleaves on the horizontal line with frequency of large cleave angle, bad cleave shape and no cleave at all. When the frequency of large cleave angle increases, **Active Blade** Management Technology can detect this increasing ratio point and rotate the blade position automatically. **Active Blade** Management Technology significantly reduces frequency of large cleave angles occurring but even when it does occur **Active Fusion** Control Technology can reduce high splice loss by precise fusion control.


The 90S+ can minimize the occurrence of high splice loss and contribute to reduce the risk of re-Installation by using these 2 key technologies together.

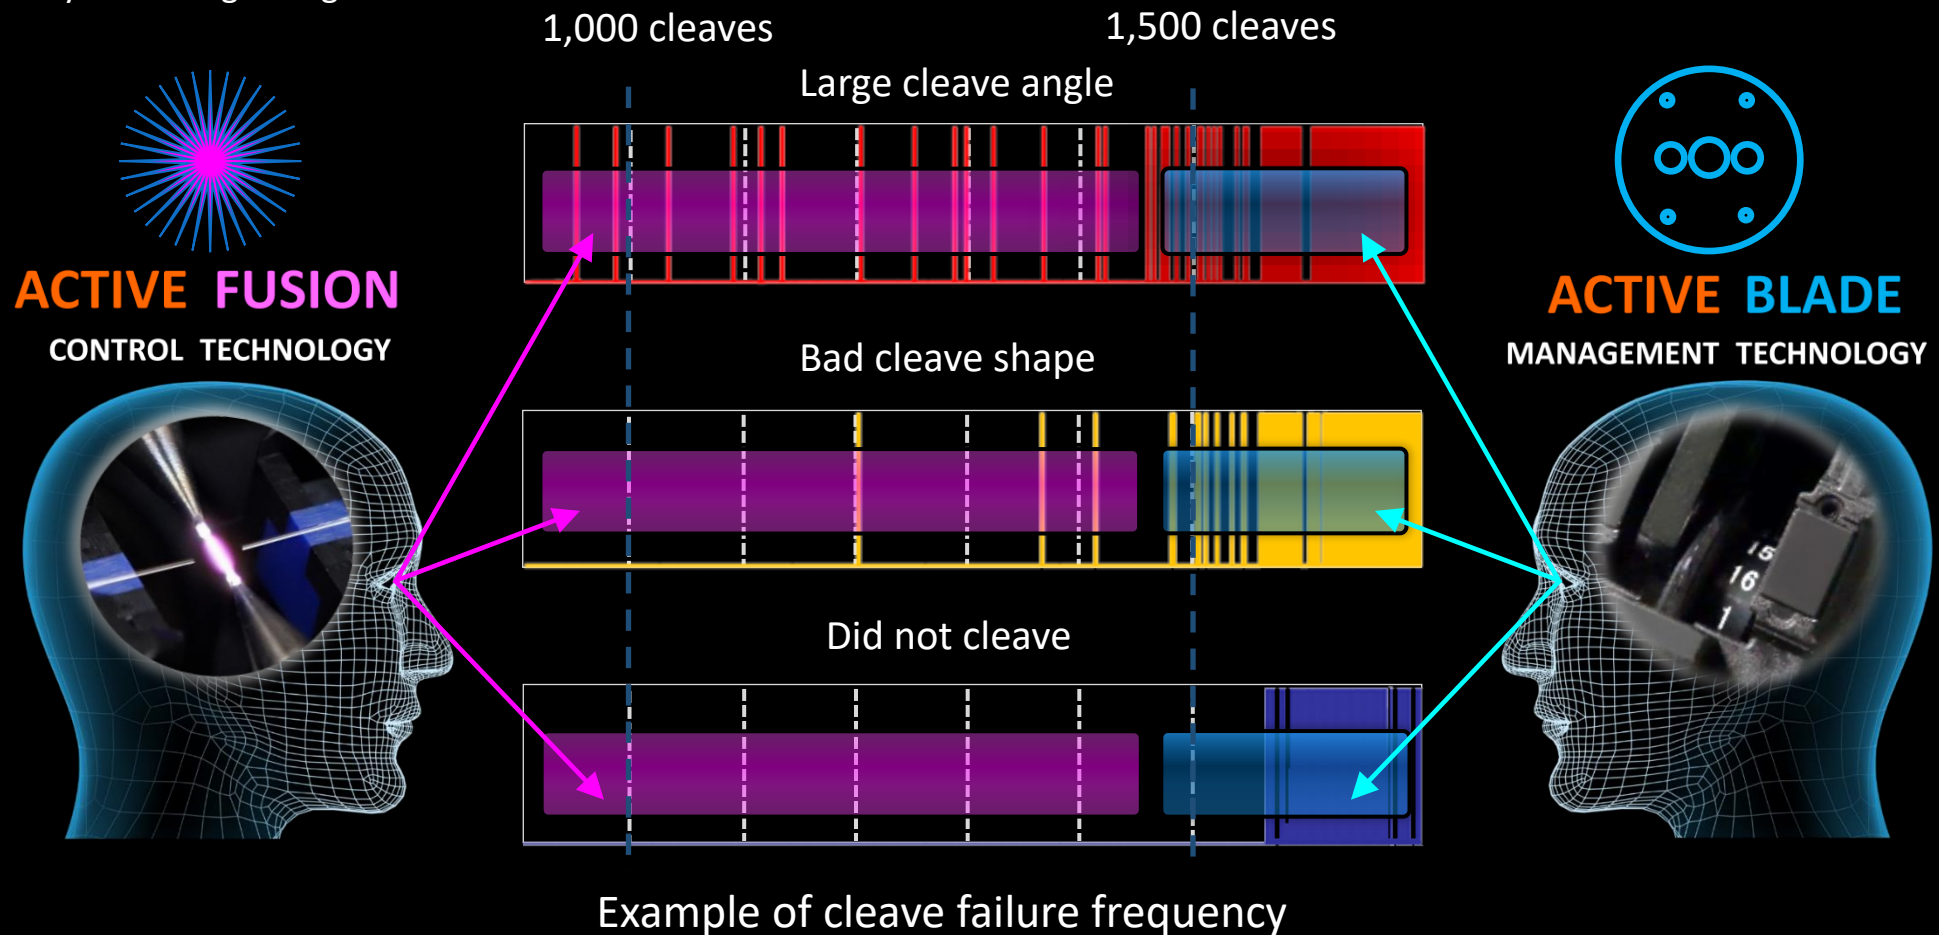

Operation Time Reduction

1. Automatic Open-Close Wind protectors


The faster automated features of the 90S+ reduce installation times. With this splicer, an operator can complete the entire splice process from splicing to heating without touching the 90S+ and only moving the fiber.

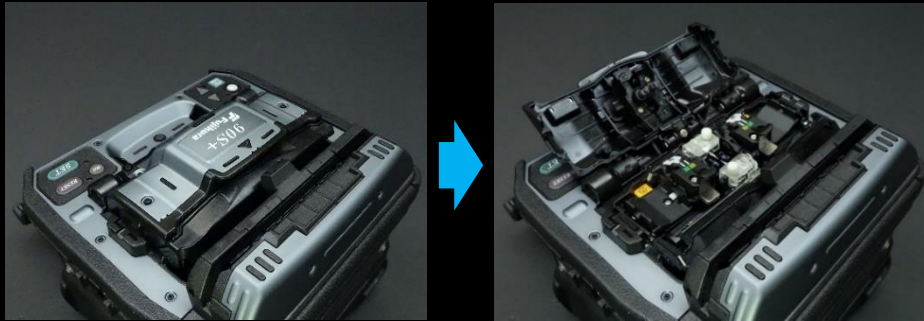

Automatic Open-Close wind protectors

2. Operation time reduction

The shape of the sheath clamp is optimized for 60mm length protection sleeves. The length from splice point to the edge of the sheath clamp is 30mm. Therefore, it is easy to center the protection sleeve over the splice by using your fingers to reference the splice point.

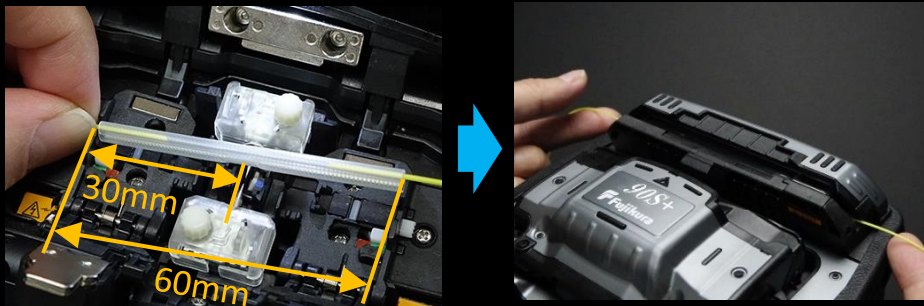


Easy centering

Automatic heater clamp

3. Fiber retention clamp


The fiber retention clamps support the automated operations. When the sheath clamps open automatically after splicing, the fiber retention clamps gently hold the spliced fiber to keep it from flying out. The retention clamps release when the fiber is lifted by the operator.

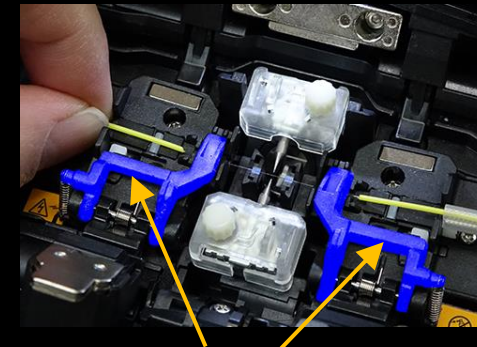

Fiber retention clamps

4. Operation time reduction

These functions enable the 90S+ to reduce operation time by 50% over the previous model.

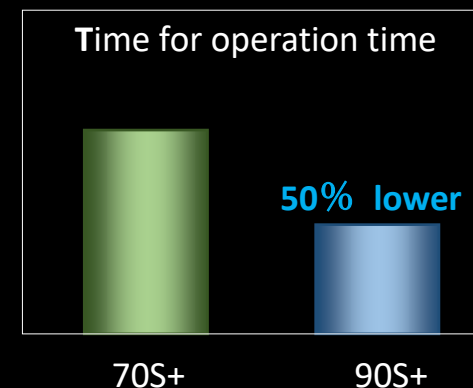

User Friendly


1. Carrying Case

There are multiple ways to utilize the 90S carrying case. The 90S+ is ready to use just by opening the case, but it is also possible to use the 90S+ on top of the carrying case or only with the work tray depending on the work environment.



2. Work Tray

The newly designed work tray has many functions. There are two drawers for storage which are large enough to store tools or battery packs. Also, the work tray can be divided in two, so it is configurable to fit your work space.

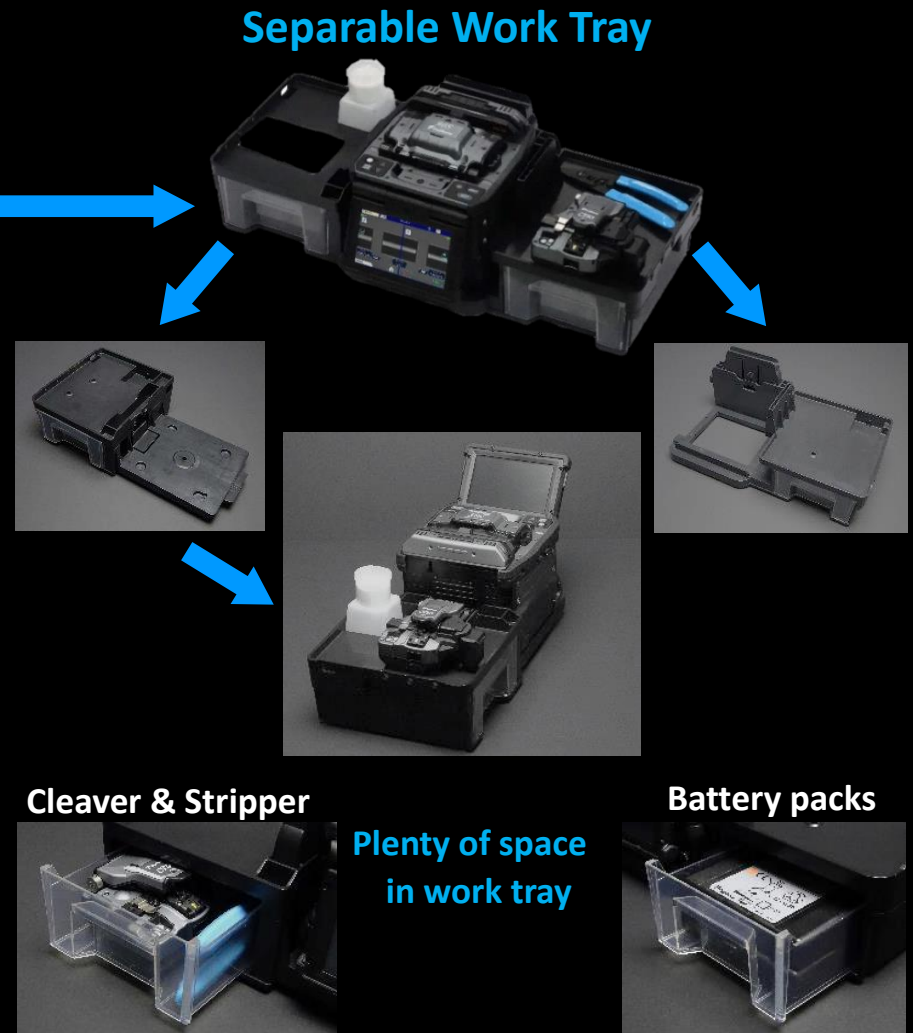

User Friendly

3. Loose tube Compatibility

The sheath clamp of the 90S+ is compatible with loose tube fiber. The Protrusion part on of the sheath clamp for loose tube fiber engages or retracts by simply changing the switch position with your finger.

Protrusion for loose tube fiber

Protrusion Switch


Protrusion Switch Green

Protrusion Switch Red

Protrusion can fix fiber position

4. Tool-less Electrodes and illumination


The 90S+ electrodes come as an “assy” including the fixing screw. You can rotate the screw by hand without tools, enabling easy electrode replacement.

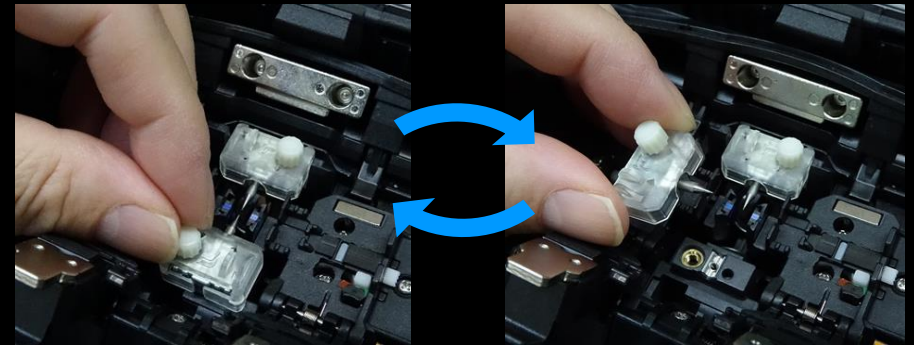

The transparent electrode covers support wider illumination of the v-groove. As the sheath clamp opens on the opposite side of the illumination lamp, the sheath clamp area is illuminated without shadow.

70S+











90S+

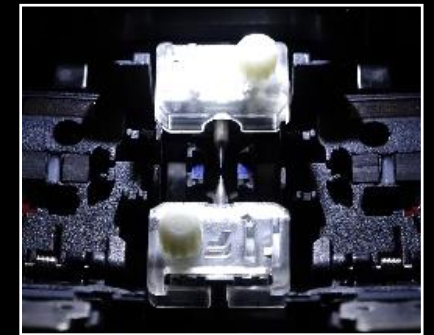

Wider Illumination range

Standard Package

90S+ Standard Package



Description	Model No.	Qty
Core Alignment Fusion Splicer	90S+	1pc
(1) Battery Pack*	BTR-15	1pc
(2) AC Adapter	ADC-20	1pc
(3) AC Power Cord	ACC-14, 15, 16 17 or 18	1pc
(4) USB Cable	USB-01	1pc
(5) Fusion Splicer Strap	ST-02	1pc
(6) Electrodes (spare)	ELCT2-16B	1pair
(7) Fiber Holder Set Plate	SP-03	1pair
(8) Carrying Case	CC-39	1pc
(9) Work Tray Left	WT-09L	1pc
(10) Work Tray Right	WT-09R	1pc
(11) Work Tray J-Plate	JP-09	1pc
(12) Tripod Screw	TS-03	2pcs
(13) Carrying Case Strap	ST-03	1pc
(14) Alcohol Dispenser	AP-02	1pc
(15) Quick Reference Guide	QRG-02-E	1pc
Single Fiber Stripper	SS03 or SS01	1pc
Optical Fiber Cleaver	CT50	1pc
(1) Fiber Scrap Collector	FDB-05	1pc
(2) Fiber Setting Plate	AD-10-M24	1pc
(3) Case, for cleaver	CC-37	1pc
(4) Hexagonal Wrench	HEX-01	1pc

* Please follow IATA regulation when shipping the battery by air.

Specifications



90S+ Specifications

Item		Specification
Fiber alignment method		Active core alignment
Fiber count can be spliced		Single fiber
Applicable fiber	Fiber type	Single mode optical fiber
	Cladding dia.	Multi mode optical fiber
Applicable coating	Sheath clamp	80 to 150µm
		Coating dia. : Max. 3000µm
Fiber splice performance	Splice loss *2	Cleave length : 5 to 16mm *1
		ITU-T G.652 : Avg. 0.02dB
		ITU-T G.651 : Avg. 0.01dB
		ITU-T G.653 : Avg. 0.04dB
		ITU-T G.654 : Avg. 0.04dB
		ITU-T G.655 : Avg. 0.04dB
	Splice time *3	ITU-T G.657 : Avg. 0.02dB
Applicable protection sleeve	Sleeve type	SM FAST mode : Avg. 7 to 9sec.
	Sleeve length	AUTO mode : Avg. 14 to 16sec.
	Sleeve dia.	Heat shrinkable sleeve
Sleeve heat performance	Heat time *4	Max. 66mm
		Max. 6.0mm before shrinking
Fiber tensile test force		60mm slim mode : Avg. 9 to 10sec.
Electrode life *5		60mm mode : Avg. 13 to 15sec.
Fiber tensile test force		Approx. 2.0N
Electrode life *5		Approx. 5000 splices
Physical description	Dimensions W	Approx. 170mm without projection
	Dimensions D	Approx. 173mm without projection
	Dimensions H	Approx. 150mm without projection
	Weight	Approx. 2.8kg including battery
Environmental condition	Temperature	Operate : -10 to 50 degreeC
	Humidity	Storage : -40 to 80 degreeC
	Altitude	Operate : 0 to 95%RH non-condensing
AC adaptor	Input	Storage : 0 to 95%RH non-condensing
	Output	Max. 5000m
Battery pack	Type	AC100 to 240V, 50/60Hz, Max. 1.5A
	Capacity *6	Rechargeable Lithium Ion
	Temperature	Approx. DC14.4V, 6380mAh
	Battery life *7	Approx. 300 splice and heat cycles
		Recharge : 0 to 40 degreeC
Display	LCD monitor	Storage : -20 to 30 degreeC
	Magnification	Approx. 500 recharge cycles
Illumination	V-grooves	TFT 4.9 inches with touch screen
	PC	200 to 320x
Interface	External LED lamp	LED lamp
	Ribbon Stripper	USB2.0 Mini B type
	Wireless *8	USB2.0 A type
		Approx. DC5V, 500mA
Data storage	Splice mode	Mini DIN 6pin
	Heat mode	DC12V, Max. 1A
	Splice result	Bluetooth 4.1 LE
	Splice image	100 splice modes
Screw hole for tripod		30 heat modes
Other features	Automatic functions	20000 splices
		100 images
		1/4-20UNC
		Splice mode selected using fiber type analysis
		Fusion power calibration
		Wind protector : open and close
	Reference guide	Sheath clamp : open
Sheath clamp	Heater lid : open and close	
Electrode	Heater clamp : open and close	

90S+ Options

Item	Model	Remark
Fiber holder	FH-70-200	200µm coating diameter
	FH-70-250	250µm coating diameter
	FH-70-900	900µm coating diameter
	FH-FC-20	900µm in 2mm diameter cable
	FH-FC-30	900µm in 3mm diameter cable
DC Adapter	DCA-03	Connect AC adapter not through battery
DC power cord	DCC-20	Car cigar socket to BTR-15/DCA-03
	DCC-21	Car battery to BTR-15/DCA-03
Transfer Clamp	CLAMP-DC-12	Transferring drop cable on work tray
J-Plate	JP-10	Attaching to splicer, not to work tray
	JP-10-FC	JP-10 with fiber clamps
Protection sleeve	FP-03	60mm, Max. 900µm coating diameter
	FP-03(L=40)	40mm, Max. 900µm coating diameter
	FP-03M	FP-03 with non-magnetic material

Notes

- *1 Cleave length range depending on fiber type
 5 to 16mm : 125µm cladding dia. and 250µm coating dia.
 10 to 16mm : 125µm cladding dia. and 400 or 900µm coating dia.
 5 to 10mm : 80µm cladding dia. and 160µm coating dia.
 5 to 16mm : 150µm cladding dia. and 250µm coating dia.
- *2 Measured with a cut-back method relevant to ITU-T and IEC standard after splicing Fujikura identical fibers. The average splice loss changes depending on the environmental condition and fiber characteristics.
- *3 Measured at room temperature. The definition of splice time is from the fiber image appearing on LCD monitor to the estimated loss displayed. The average splice time changes depending on the environmental conditions, fiber type, and fiber characteristics.
- *4 Measured at room temperature with the AC adapter. The heat time is defined from the start beep sound to the finish beep sound. The average heat time changes depending on the environmental conditions, sleeve type and battery pack condition.
- *5 The electrode life changes depending on the environmental conditions, fiber type and splice modes.
- *6 Test condition
 (1) Splice and heat time : 1 minute cycle
 (2) Using the splicer power save settings
 (3) Using a not degraded battery
 (4) At room temperature
 The battery capacity changes when testing with different conditions from the above.
- *7 The battery capacity decreases to a half after approx. 500 discharge and recharge cycles. The battery life is shortened further when using outside of the storage temperature range, operating temperature range, if completely discharged by storing for a long time without recharging.
- *8 Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.

Specifications



CT50 Specifications

Item		Specification
Applicable fiber	Fiber type	Single mode optical fiber Multi mode optical fiber
	Fiber count	Up to 16 fiber ribbon
	Cladding dia.	Approx. 125µm
Applicable coating	Fiber setting plate	AD-10-M24 : Max. 900µm coating diameter AD-50 : Max. 3mm coating diameter
	Fiber holder	Coating shape : Refer to splicer options AD-10-M24 : 5 to 20mm *1
	Fiber setting plate	AD-50 *C.D. : coating diameter C.D. = 250µm or less : 5 to 20mm *1 250µm < C.D. < =900µm : 10 to 20mm 900µm < C.D. < =3mm : 14 to 20mm
Cleave length	Fiber holder	Approx. 10mm
	Single fiber	Avg. 0.3 to 0.9 degrees
	Fiber ribbon	Avg. 0.3 to 1.2 degrees
Blade life *3		Approx. 60000 fiber cleaves
Physical description	Dimensions W	Approx. 117mm without projection *4
	Dimensions D	Approx. 94mm without projection *4
	Dimensions H	Approx. 59mm without projection *4
	Weight	Approx. 306g including battery and AD-10-M24
Environmental condition	Temperature	Operate : -10 to 50 degreeC Storage : -40 to 80 degreeC
	Humidity	Operate : 0 to 95%RH non-condensing Storage : 0 to 95%RH non-condensing
Battery		2 pieces of LR03, AAA dry battery
Wireless interface *5		Bluetooth 4.1 LE
Screw hole for tripod		1/4-20UNC
Other features	Blade rotation	Motorized rotation Manual rotation dial
	Replaceable parts	Blade Clamp arm

CT50 Options

Item	Model	Remark
Fiber Setting Plate	AD-50	Optional fiber setting plate
Blade	CB-08	Blade for replacement
Clamp Arm	ARM-CT50-01	Clamp arm with anvil for replacement
Fiber Scrap Collector	FDB-05	Spare scrap collector
Side cover	SC-CT50-01	Side cover instead of scrap collector
Spacer	SPA-CT08-10	Cleave length 10mm
	SPA-CT08-09	Cleave length 9mm
	SPA-CT08-08	Cleave length 8mm

Notes

- *1 When the cleave length is less than 10mm, the coating diameter should be 250µm or less. Also, a blade height adjustment is required before cleaving. The average cleave angle is worse than the specification when the cleave length is less than 10mm.
- *2 Measured with an interferometer at room temperature, not with a splicer. A new blade was used to cleave both the single fibers and ribbon fibers. The average cleave angle changes depending on the environmental conditions, blade condition, operating method, and cleanliness.
- *3 The blade life changes depending on the environmental conditions, operating method, and the fiber type cleaved.
- *4 Measured in a condition when closing the lever.
- *5 Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc.



Visit our web site!

www.opternus.de/lwl-produkte/spleisstechik/spleissgeraete/

BEST QUALITY SERVICE
- SINCE 1978 -

Fujikura Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan
General inquiries : +81-3-5606-1164 Service & support : +81-43-484-3962

<https://www.fujikura.com>

Fujikura Europe Ltd.

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey, KT9 2NY, UK
General inquiries : +44-20-8240-2000
Service & support : +44-20-8240-2020 <https://www.fujikura.co.uk>

Opternus GmbH

Bahnhofstraße 5, 22941 Bargteheide, Deutschland
Offizieller Distributor und Servicepartner für Deutschland, Österreich und Luxemburg
Tel.: +49 (0) 4532-2044-100, info@opternus.de, <https://www.opternus.de>