

## DI-1000L-Pro™

*The DI-1000L-PRO combines the all digital wide-view DI-1000L microscope with our ConnectorView™ Plus v2 Pass/Fail software for fast objective analysis of fiberoptic connector endfaces. Powered by it's direct USB2.0 connection to your PC, the DI-1000L-Pro can provide you with automatically centered Analysis Reports and Summary Reports in Excel® or text.*



### Features Include:

- Focus easily, quickly
- Operate with one hand
- Create Auto-centered Analysis Reports
- Analyze live or frozen images
- Include notes with your Analysis Reports
- Use IEC 61300-3-35 analysis criteria, or set your own
- Inspect patchcords (male) and bulkheads (female)
- Connect directly to your PC with USB2.0
- Use your mouse or built-in freeze/capture button
- Enlarge images with digital zoom

überreicht durch:

**Opternus**

Opternus GmbH Optische Spleiss- & Messtechnik

Bahnhofstr. 5  
D-22941 Bargtheide

Tel. +49(0)4532-20 44-0  
Fax +49(0)4532-20 44-25

Büro Süd:

Wäldenbronner Str. 2  
D-73732 Esslingen


Tel. +49(0)711-3 10 59 99-0  
Fax +49(0)711-3 10 59 99-99

E-Mail: [info@opternus.de](mailto:info@opternus.de) - [www.opternus.de](http://www.opternus.de) - [www.opternus-shop.de](http://www.opternus-shop.de)


**DI-1000L-PRO Package**



- DI-1000L USB 2.0 Digital Inspection probe
- CD with ConnectorView™ Plus v2 software, driver, and User's Manual
- Tip for SC and FC PC type female connectors
- Tip for LC PC type female connectors
- Universal tip for 2.5mm PC male connectors
- Universal tip for 1.25mm PC male connectors
- Soft carrying case

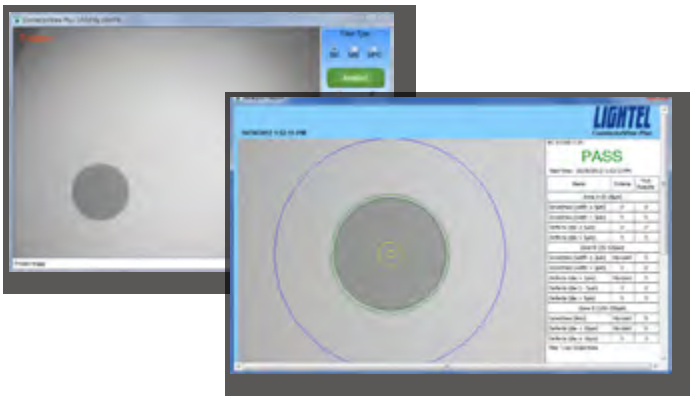

*Auto-center your Analysis Reports*

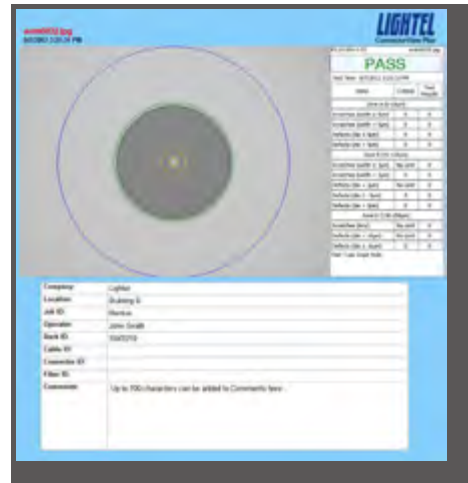

*Include notes in your Analysis Reports*

**DI-1000L Specifications**

|                             |  |
|-----------------------------|--|
| Field of View               | ~ 680µm x 510µm  |
| Detectable Resolution       | 0.5 µm detectable  |
| Focus                       | Manual adjustment, 2mm max travel                            |
| Camera                      | 1/3" CMOS  |
| Light Source                | Blue LED   |
| Power Supply                | PC USB2.0 port   |
| Dimensions                  | 175mm x ø35 mm (Probe without cap)                           |
| Weight                      | 200g   |
| Operating Temperature       | 0°C to 50°C  |
| Storage Temperature         | -20°C to 70°C  |
| Supported Operating Systems | Windows XP®, Vista®, Windows 7® 32-bit and 64-bit processors |



**LIGHTTEL**

2210 Lind Ave SW, Suite 100  
 Renton, WA 98057 USA  
 (425) 277-8000 Tel  
 (425) 277-5280 Fax  
[www.lighttel.com](http://www.lighttel.com)

überreicht durch:  
**Opternus**

Opternus GmbH Optische Spleiss- & Messtechnik  
 Bahnhofstr. 5  
 D-22941 Bargtheide  
 Tel. +49(0)4532-20 44-0  
 Fax +49(0)4532-20 44-25  
 E-Mail: [info@opternus.de](mailto:info@opternus.de) - [www.opternus.de](http://www.opternus.de) - [www.opternus-shop.de](http://www.opternus-shop.de)

Büro Süd:  
 Wäldenbronner Str. 2  
 D-73732 Esslingen  
 Tel. +49(0)711-3 10 59 99-0  
 Fax +49(0)711-3 10 59 99-99