


High Resolution Optical Time-Domain Reflectometer For Large Core Optical Fibers

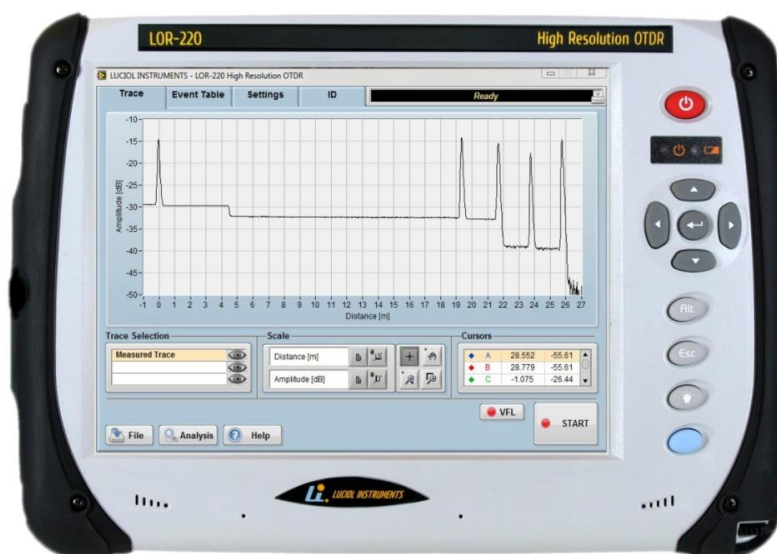

**Wavelength range
500-1064 nm**

**Industry-leading
resolution (1 ns
pulses)**

**Fully portable OTDR
format**

**High dynamic range
with short pulses**

**Custom systems for
large core fibers up
to 1mm**

**Patented design; US
patent # 7,593,098**

The LOR-220 POF is a portable high resolution OTDR specially designed for testing large core optical fibers such as 1mm PMMA (POF) or others. The LOR-220 POF is a universal tool to characterize insertion losses and fiber attenuation. You can characterize the original assembly, monitor possible degradation for preventive maintenance purposes and troubleshoot in case of a fault in the system. The extremely short dead-zones ensure that you can detect, localize and measure events, which no other OTDR can show, such as fiber breaks and bend-loss, even after a large reflection.

The LOR-220 POF is available on a custom basis for most large core optical fibers and it has several wavelengths options.

APPLICATIONS

- Fiber, cable manufacturing
- Characterization/monitoring/troubleshooting of fiber assemblies
Fiber optic sensors
- And more...

© 2022 Luciol Instruments SA. All rights reserved. Specifications subject to change without notice. Do not reproduce, redistribute, or repost without written permission from Luciol Instruments. Rev.6.0 December 2022

SPECIFICATIONS

Optical

Standard wavelength options* (± 10 nm):

650 nm, 520 nm

Standard fiber types*:

PMMA 1 mm

Optical connector:

SMA, ST (others on request)

Optical pulse width: 1 ns

Measurement range:

0.5 km

Distance units:

kilometer, meter, feet, miles, time(ns)

Sampling resolution:

any multiple of 2.5 cm (250 ps)

Dynamic range¹:

Rayleigh backscattering: > 20 dB (S/N = 1)

Deadzones¹:

Attenuation dead-zone² (RL = 45 dB): 40 cm

Attenuation dead-zone² (RL = 14 dB): < 1 m

Loss accuracy¹:

± 0.1 dB ± 0.02 dB/dB (MMF)

Hardware

OS: Windows 11 (Windows 10 on request)

Processor: Intel N4200

RAM: DDR3L, 4 GB

Storage: SSD, 120 GB (more optional)

Display: Touchscreen TFT 10.4" (800x600)

Interfaces: 2x Ethernet RJ45
4x USB 3.0
1x HDMI
1x Headphone/Microphone
WIFI/Bluetooth (optional)

Power rating: 15V/4 A

Power input: AC operation with 100 to 240 VAC,
50/60 Hz universal adapter, DC operation on
batteries (Li Ion, 6.2 Ah)

Battery operating time: 5 h

Battery charging time: 3.5 h

Size: 320 x 240 x 90 mm, Weight: 3.1 kg

Environmental

Operating temperature: 0° to +40°C (32° to 104° F)

Storage temperature: -20° to +60° (-4° to 140°F)

Relative humidity: $\leq 80\%$ (0 to 30°C), decreasing
linearly to 50% at 40 °C

Maximum operation altitude: 2000 m

Pollution degree: 2

Options:

-VFL

Visual Fault Locator on the OTDR output; can be
used as fiber identifier.

Ordering information

LOR-22X-POFYyyy-W1(/W2/W3/W4)-CC

X = # of wavelengths

YYYY = Fiber diameter μ m

W1, W2...: wavelengths

CCC: connector type (ASC, AFC, SC, FC, ST)

Ordering example:

LOR-222-POF1000-650/520-SMA-VFL

LOR-220 for 1 mm POF, with 2 wavelengths (650 nm
and 520 nm), SMA connector, with VFL.

*Other wavelengths and configurations are
available on a custom basis. Please contact Luciol
Instruments with your special requirements.

** Please contact Luciol Instruments for details

Notes:

1: Typical

2: The attenuation dead-zone will be increased by the
fibers modal dispersion