

MaxTester 610

SMARTER COPPER TESTING FOR INSTALLATION TECHNICIANS



EXFO Sync



EXFO Connect
Compatible



smart R™

Smarter verification of copper pairs and location of faults during the installation and repair of voice and DSL circuits

Feature(s) of this product is/are protected by US patents 7,583,727 and equivalent patent(s) pending and/or granted in other countries.

KEY FEATURES AND BENEFITS

Aligns with existing methods and procedures; perform single-ended testing or testing with a far-end device (FED) to minimize repair times and costs

Full suite of digital multimeter measurements to quickly and effectively determine the electrical health of the network

Optional TDR with variable gain and RFL/K-test allows service providers to scale the product based on existing or new methods and procedures

SmartR™ features allow users to quickly and accurately determine physical copper circuit quality and locate faults, in addition to performing high-voltage balance testing on inactive pairs

Designed to face the challenges of the outside plant environment with an IEC IP54 rating

Configurable pass/fail results for automated closeout testing; upload the results to the cloud with ease

THE MAXTESTER 600 SERIES



MAX-630G
xDSL and Multiplay
test set



MAX-635G
Copper, xDSL and
Multiplay test set



Specifications and descriptions are subject to change without prior notice.


Opternus Opternus GmbH Bahnhofstr. 5 • D-22941 Bargteheide • Tel. +49(0)4532-20 44-0 • Fax -25 • E-Mail info@opternus.de • www.opternus.de
©Opternus GmbH 2020-06

THE PERFECT TOOL FOR COPPER I&R TESTING

The MaxTester 610 is designed for the installation and repair (I&R) of voice and DSL circuits. Its small form factor, rugged design and easy-to-use menus make it the ideal tool for outside-plant I&R technicians. With the MaxTester 610, the testing process is highly automated, enabling technicians to close their jobs quickly and efficiently. In addition, the large display of the MaxTester 610 makes it even more user-friendly, and when it comes to saving results, it provides technicians with many connectivity options for uploading tests and compiling reports.

WORK SMARTER—NOT HARDER


The MaxTester 610 allows technicians and engineers alike to work smarter—not harder. SmartR™ is a suite of intelligent and automated tests that enable any technician to quickly and easily gain an understanding of the condition of the line under test, as well as to identify and locate a variety of common circuit faults. SmartR™ comes with several interesting features. Its Pair Detective feature automatically runs the most common line tests and provides graphical, color-coded results and pass/fail indications to detect conditions, including shorts, grounds, opens, battery, splits and imbalances. Fault Mapper utilizes time-domain reflectometry (TDR) and resistive fault location (RFL) technology to provide the additional capability of identifying the location of the service affecting line faults, including bridged taps, shorts, grounds and opens. SmartR™ presents results in an easy-to-understand, graphical format, with plain language feedback, making copper troubleshooting easier than ever before.

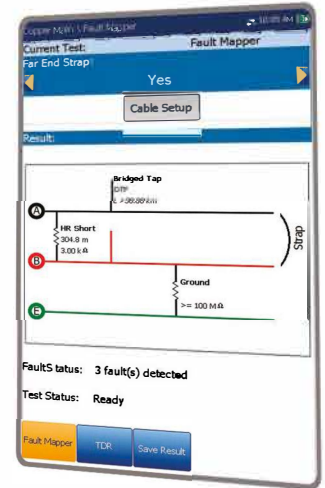

KEY COPPER APPLICATIONS

- › Detection of potential bottlenecks on subscriber loops to ensure high-quality, consistent and error-free multiplay services
- › 35 MHz spectrum analysis for circuit qualification in any VDSL2 band plan (8, 12, 17, 30 and 35 MHz)
- › Loop and fault analysis, using proven TDR and RFL/K-test techniques for VDSL2 or ADSL2+ prequalification
- › Measurement and reporting of suspect voltages, opens, shorts and balance issues from a single end, or utilizing an FED that can be remote controlled by the MaxTester to put the necessary opens and shorts at the end of the circuit under test
- › Determine the maximum ADSL2+, VDSL2-17a and VDSL2-35b data rates that a copper loop could support, prior to connecting/provisioning the circuit and equipment, with the MaxTester's Data Rate Prediction (ADRP) pre-qualification report

KEY CHARACTERISTICS

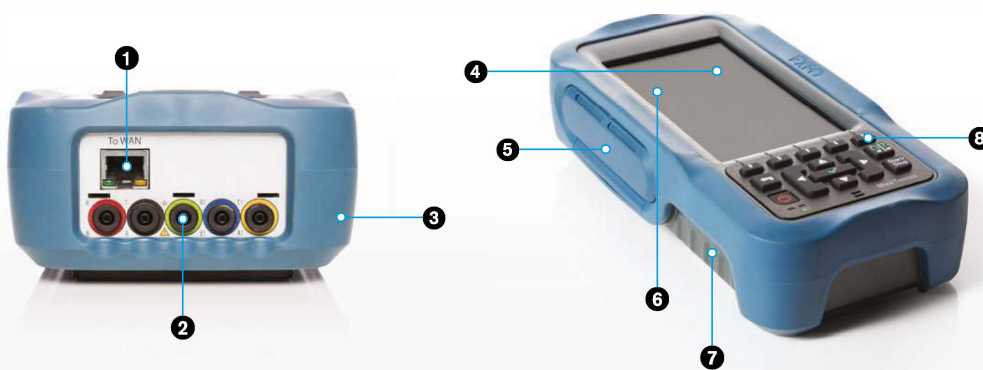

- 1 Ethernet connector sealed against the environment
- 2 Copper connectors sealed against the environment
- 3 All-round rubber bumper
- 4 Touchscreen color LCD—daylight visible
- 5 Interface connections—water and dirt protected
- 6 Innovative and icon-driven user interface
- 7 Handgrip area
- 8 Simple keypad




Specifications and descriptions are subject to change without prior notice.

COMPREHENSIVE METALLIC TESTING

Verification of copper quality is a snap with the copper measurement capabilities of the MaxTester 610. Sporting industry standard AC and DC voltage measurements, resistance (shorts) and capacitance (opens) measurements, power influence, balance and impulse noise, technicians obtain results that are graphically clear and concise with pass/fail indication. Technicians have the option of running single-ended tests, or running tests against an optional FED.

The MaxTester 610 also features a POTS dialer and an optional TDR with dual-trace comparison capability and resistive fault locator (2/4 wire RFL and K-test) for locating loop faults. The optional wideband testing suite allows the qualification of circuits at VDSL2 frequencies of up to 35 MHz and includes PSD, near-end crosstalk (NEXT), impulse noise and attenuation analysis.

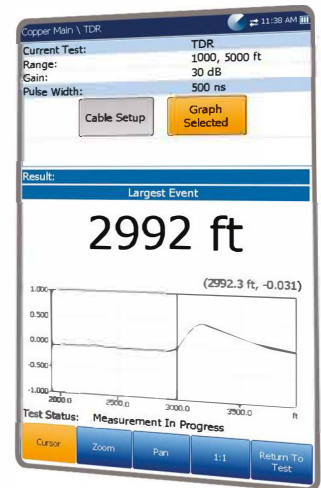

ALL THE RIGHT FEATURES FOR INSTALLATION TECHNICIANS

With its small form factor, the MaxTester 610 can go anywhere technicians need to go. It is rugged and light, and all connectors are protected from the rain—just what is needed for the demanding outside-plant environment.

Automated testing

Thresholds can be set and saved for key copper tests. When tests are run, users are given a clear graphical pass/fail result so they can quickly move on to the next job or investigate further. Test profiles can easily be transferred between units to ensure that all technicians from the same organization are testing to the same thresholds.

Easy-to-use GUI



The next-generation user interface of the MaxTester 610 was designed with first-level technicians in mind. The large touchscreen display features colored icons and graphics for easy configuration and operation, and is simple to use for both experienced and novice users. Users can “capture” important GUI screens, whether menu’s or test results with the Screen Capture capability of the MAX-610. Users can save the data to a USB memory device or upload to EXFO Connect’s File Manager.

Asset and results management

In today’s highly competitive environment, quality of service delivered to subscribers is paramount for service providers. With solutions such as EXFO Connect and EXFO Sync coupled with the MaxTester 610, service providers can manage their fleet of MaxTester units and ensure that they have the most up-to-date software installed and properly configured. These solutions on the MaxTester 610 also make it possible for service providers to have test results in hand for data mining and post-visualization, thereby enabling them to proactively manage loop plants and ensure that they are of the highest quality.

Battery-powered

The MaxTester 610 is equipped with a battery using the latest technology in rechargeable cells. When charging is required, technicians can either use the optional 12 VDC vehicle charger or the supplied AC adapter.

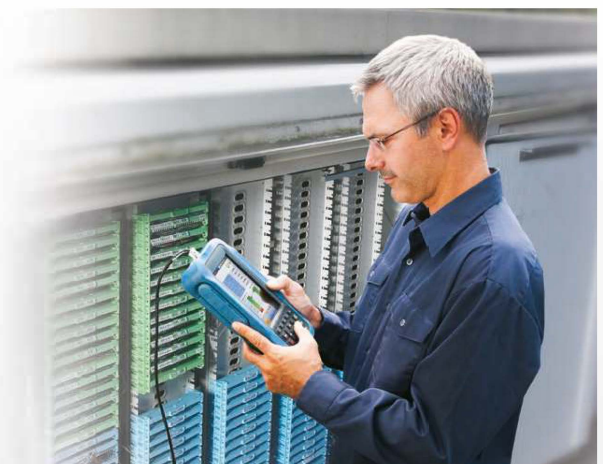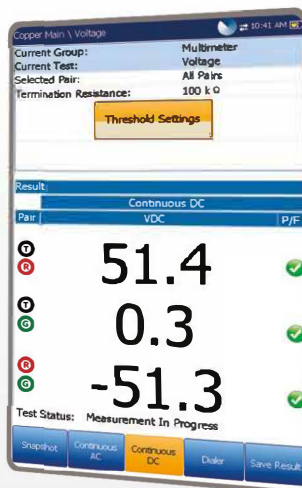

EXFO | Connect

AUTOMATE ASSET MANAGEMENT. GET CONNECTED.

The EXFO Connect cloud-hosted solution provides an automated, secure environment that links your EXFO test instruments together and enables the management of your deployed inventory of test sets.

EXFO Connect enables automated downloads of latest software versions to all test sets in the field to ensure consistency of testing across the organization. Test profiles and threshold settings may also be deployed to all units, to mandate testing according to the latest procedures. Enable EXFO Connect on your fleet of MaxTester units to improve operational efficiency at all levels of your business.

KEY FEATURES



TEST EQUIPMENT MANAGER

Automated inventory tracking and software download



FILE MANAGER

Download/upload files, work orders, test configurations or procedure documents



CONTRACTOR MODE

Secure, segregated access for test-result upload, and automated file download

Visit EXFO.com/EXFOConnect for details and features compatibility with the MaxTester handheld series.



EXFO Sync

REAL-TIME COPPER TEST RESULTS UPLOAD—STRAIGHT FROM THE FIELD

Working in the field with an Android™ or iOS™ device?

Download the EXFO Sync application for your smart device.*

EXFO Sync is an app (runs on Android and iOS) that operates together with the MAX-610 Copper Test Set. It provides a fully automatic copper test script and WiFi transfer of the results files to a phone or tablet for upload to the customer's server.

With EXFO Sync, your copper test results can be uploaded in real-time to a central location for access and further analysis to identify trouble patterns, assess technician performance or target customers for upsell to higher revenue services.

- › Copper test result are uploaded, live from the site
- › GPS tagging gives visibility of location of test for mapping of test history and network performance
- › Ensure compliance to service provider workflow process
- › Flexibility to upload test results to an FTP or HTTPS server
- › Secure, password-protected connection to upload and access results

* Upload to smart devices is supported only over WiFi and only for the copper autotest.

Download from
Google play



Available on the
App Store



Note

Android and Google Play are trademarks of Google Inc. iOS is a registered trademark of Cisco System, Inc. and/or its affiliates in the U.S. and certain other countries.



Specifications and descriptions are subject to change without prior notice.

COPPER SPECIFICATIONS ^{a, b, c}

Transmitter characteristics

Frequency range (200 Hz to 20 kHz)	Frequency resolution	1 Hz steps		
	Frequency uncertainty (accuracy)	$\pm (50 \text{ ppm} + 1 \text{ Hz})$		
	Level range (dBm)	-20 to 10 at 600 Ω		
	Level resolution	0.1 dB		
	Level uncertainty (accuracy)	$\pm 1 \text{ dB}$		
	Impedance (Ω)	600		
Frequency range (20 kHz to 2.2 MHz)	Frequency resolution	1 kHz steps		
	Frequency uncertainty (accuracy)	$\pm (50 \text{ ppm} + 100 \text{ Hz})$		
	Level range (dBm)	-20 to 10 at 100 Ω		
	Level resolution	0.1 dB		
	Level uncertainty (accuracy)	$\pm 1 \text{ dB}$		
	Impedance (Ω)	100, 120, 135, 150		
Frequency range (2.2 MHz to 30 MHz)	Frequency resolution	1 kHz steps		
	Frequency uncertainty (accuracy)	$\pm (50 \text{ ppm} + 100 \text{ Hz})$		
	Level range (dBm)	-20 to 0 at 100 Ω		
	Level resolution	0.1 dB		
	Level uncertainty (accuracy)	$\pm 1 \text{ dB}$		
	Impedance (Ω)	100, 120, 135, 150		
Receiver characteristics	Reception frequency range	200 Hz to 20 kHz 20 kHz to 35 MHz		
	Frequency uncertainty range (accuracy)	$\pm (50 \text{ ppm} + 1 \text{ digit})$ for 20 kHz to 30 MHz		
	VF reception level range (dBm)	-90 to 15 at 600 Ω		
	VF level uncertainty (accuracy)	200 Hz to 20 kHz -90 dBm to -50 dBm, uncertainty (accuracy) $\pm 2 \text{ dB}$ -50 dBm to 15 dBm, uncertainty (accuracy) $\pm 1 \text{ dB}$		
	WB reception level range (dBm)	-90 to 15 at 100 Ω and 135 Ω		
	WB level uncertainty (accuracy)	20 kHz to 2.2 MHz -90 dBm to -50 dBm, uncertainty (accuracy) $\pm 2 \text{ dB}$ -50 dBm to 15 dBm, uncertainty (accuracy) $\pm 1 \text{ dB}$ 2.2 MHz to 30 MHz -90 dBm to -50 dBm, uncertainty (accuracy) $\pm 2 \text{ dB}$ -50 dBm to 15 dBm, uncertainty (accuracy) $\pm 1 \text{ dB}$		
	Impedance (Ω)	100, 120, 135, 150, 600		
	POTS dialer	DTMF	0 - 9, #, *	
		Phonebook	25 entries	
	Digital multimeter (DMM)	Test type	Snapshot and continuous	
Impedance selection (for voltage measurement)		100 k Ω , 1 M Ω		
	Measurement	Range	Resolution	Uncertainty (accuracy)
	DC voltage	0 to 400 V	0.1 V for 0 to 99.9 V 1 V for 100 V to 400 V	$\pm (1 \% + 0.5 \text{ VDC})$
	AC voltage	0 to 280 Vrms	0.1 V for 0 to 99.9 V 1 V for 100 V to 280 V	$\pm (1 \% + 0.5 \text{ VAC})$
	Isolation resistance (stress/leakage)	0 to 1 G Ω , auto-ranging 1 k Ω to 99 M Ω 100 M Ω to 999 M Ω	Three digits	$\pm (2 \% + 1 \text{ digit})$ $\pm (5 \% + 1 \text{ digit})$
	Resistance	0 to 100 M Ω 0 to 999 Ω 1 k Ω to 100 M Ω	Three digits	$\pm (1 \% + 5 \Omega)$ $\pm (2 \% + 1 \text{ digit})$
	Capacitance	0.1 nF to 2 μF	Four digits	$\pm (2 \% + 50 \text{ pF})$
	DC current	0 to 110 mA	0.1 mA	$\pm (2 \% + 1 \text{ mA})$
	AC current	0 to 110 mA	0.1 mA	$\pm (2 \% + 1 \text{ mA})^d$
	Station ground	0 to 1 M Ω 0 to 999 Ω 1 k Ω to 1 M Ω	Up to three digits	$\pm (1 \% + 3 \Omega)$ $\pm (2 \% + 1 \text{ digit})$

Notes

- a. Subject to change without notice.
b. Typical, at 23 °C \pm 3 °C, on batteries, with no type B USB connection.
c. Specifications based on 24 AWG (PE 0.5 mm) cabling.
d. From 10 mA to 110 mA.



Specifications and descriptions are subject to change without prior notice.

COPPER SPECIFICATIONS^{a, b, c} (continued)

Isolation resistance (stress/leakage) (continued)	Source	50 to 500 VDC (current safely limited to 2 mA)
	Soak timer (s)	1 to 60
VF noise measurement	Frequency range	200 Hz to 20 kHz
	Level range (dBm)	-90 to 20
	Resolution (dB)	0.1
	Uncertainty (accuracy)	-90 dBm to -50 dBm, uncertainty (accuracy) ± 2 dB -50 dBm to +20 dBm, uncertainty (accuracy) ± 1 dB
	Filters	ITU: none, psophometric, P-notched, 3.4 kHz, D-filter, 15 kHz ANSI: none, C-message, C-notched, 3.4 kHz, D-filter, 15 kHz
	Impedance	600 Ω
VF impulse noise	Low threshold (dBm)	-40 to 0, in 1 dB steps
	Mid threshold	Low threshold plus separation
	High threshold	Mid threshold plus separation
	Separation (dB)	1 to 6, in 1 dB steps
	Dead time (ms)	125
	Filters	None, 3 kHz flat, C-message, psophometric, notched and D filter (IEEE 743-1995)
	Counter	Maximum 999 for each threshold
	Timer	Maximum 100 hours
Power influence (noise to ground)	Noise range (dBm)	-60 to 10
	Uncertainty (accuracy)	-60 dBm to -50 dBm ± 2 dB -50 dBm to 10 dBm ± 1 dB
VF longitudinal balance	Frequency (Hz)	1004
	Level range (dB)	0 to 100
	Level uncertainty (accuracy) (dB)	± 1
	Impedance	600 Ω
Time-domain reflectometer (TDR)	Modes	Automatic, Manual, Peak, Xtalk (Crosstalk), Differential
	Distance range (m)	0 to 6700 (0 ft up to 22 000 ft)
	Pulse width	15 ns to 20 μ s
	Amplitude	7.5 V p-p on cable, 9 V p-p open circuit
	Velocity of propagation (VOP)	0.400 to 0.999
	Distance uncertainty (accuracy) ^d (m)	$\pm(0.5 \text{ m} + 1 \% \times \text{distance})$
	Units	Meters and feet
Load coil detection	Count	Up to 5
	Plot (kHz)	Up to 10
	Distance range (m)	Up to 8000 (up to 27 000 ft)
Near-end crosstalk (NEXT)	Frequency range	10 kHz to 30 MHz
	Level range	0 to 90 dB
	Level resolution	0.1 dB
	Level uncertainty (accuracy)	2.2 MHz: ± 2.0 dB, from 0 to 90 dB 8 MHz: ± 2.0 dB, from 0 to 80 dB 12 MHz: ± 2.0 dB, from 0 to 75 dB 17.6 MHz: ± 3.0 dB, from 0 to 75 dB 30 MHz: ± 3.0 dB, from 0 to 68 dB
	Terminations	100, 120, 135, 150 Ω
Return loss	Test type	Single, Sweep
	Frequency range	20 kHz to 2.2 MHz
	Dynamic range	0 dB to 40 dB
	Resolution	0.1 dB
	Uncertainty (accuracy)	± 0.5 dB, for dynamic range 0 dB to 20 dB
	Horizontal scale	4.3125 kHz to 2.2 MHz, in 4.3125 kHz steps
Vertical scale	0 dB to 50 dB	

Notes

- Subject to change without notice.
- Typical, at 23 °C \pm 3 °C, on batteries, with no type B USB connection.
- Specifications based on 24 AWG (PE 0.5 mm) cabling.
- Qualified up to 300 m (1000 ft) and does not include the uncertainty due to VOP.



Specifications and descriptions are subject to change without prior notice.

COPPER SPECIFICATIONS^{a, b, c} (continued)

Power spectral density (PSD)	Test type	Continuous with peak-hold
	Termination	Bridging (Hi-Z), 100, 120, 135, 150 ohm
	Vertical scale	15 dBm/Hz to -140 dBm/Hz or 20 dBm to -90 dBm
	Horizontal scale	4.3125 kHz to 17 MHz, in 4.3125 kHz steps or 8.625 kHz to 35 MHz, in 8.625 kHz steps
	Noise filters	None or E, F, G, ADSL2+, VDSL2-8, VDSL2-12, VDSL2-17, VDSL2-30 and VDSL2-35b
Wideband impulse noise	Threshold	-50 dBm (40 dBm) to 0 dBm (90 dBm) in 1 dB steps
	Termination	Bridging (Hi-Z), 100, 120, 135, 150 ohm
	Counter maximum	65 000 000
	Test duration	Maximum 100 hours
	Uncertainty (accuracy) (dB)	±2
	Noise filters	None or E, F, G, ADSL2+, VDSL2-8, VDSL2-12, VDSL2-17 and VDSL2-30
Wideband longitudinal balance	Level scale	0 up to 100 dB
	Level range uncertainty (accuracy)	2.2 MHz: ±2.0 dB, from 0 to 55 dB 8 MHz: ±2.0 dB, from 0 to 45 dB 12 MHz: ±3.0 dB, from 0 to 45 dB 17.6 MHz: ±3.0 dB, from 0 to 40 dB
	Level resolution	0.1 dB
	Frequency scale	ADSL2+: 8.6 kHz to 2.2 MHz, in 8.6 kHz steps VDSL2-8 : 17.25 kHz to 8 MHz, in 17.25 kHz steps VDSL2-12: 17.25 kHz to 12 MHz, in 17.25 kHz steps VDSL2-17: 34.5 kHz to 17.6 MHz, in 34.5 kHz steps
	Frequency uncertainty (accuracy)	±(50 ppm + 1 digit)
	Single-ended frequency response (attenuation) ^d	Distance range (m)
Single-ended frequency response (attenuation) ^d	Frequency range (Hz)	4.3 kHz to 35 MHz
	Frequency uncertainty (accuracy)	±(50 ppm + 1 digit) for 20 kHz to 30 MHz
	Level uncertainty (accuracy) (dB)	±2.0 dB typical for 2.2 MHz and 8 MHz ranges ±3.0 dB for VDSL2-12 and VDSL2-17 ±4.0 dB for VDSL2-30 ranges
	Resolution (dB)	0.1
	Horizontal scale (MHz)	ADSL2+ = 2.208, VDSL2-8, VDSL2-12 = 12, VDSL2-17 = 17.66, VDSL2-30 = 30, VDSL2-35 = 35
	Vertical scale (dB)	0 to +100
	Resistive fault location (RFL)	Test type
Fault detection (M�)		0 to 20 for single faults; up to a total fault resistance of 30 for K-test double faults only
Resolution		Three digits
Loop resistance (k�)		10 maximum
Multiple cable sections		Five (includes gauge and temperature setting)
Fault location		Total resistance, near-end to fault resistance, fault to strap resistance (three significant digits, least significant digit 0.1 �) Total length, distance to fault, distance from fault to strap (three significant digits, least significant digit 1 m)
Single fault uncertainty (accuracy)		±(0.1 � + 1% RTS)
K-test uncertainty (accuracy) ^e		±(1 � + 1% RTS)
Stressed Balance	Level range	0 to 82 dBmC
	Resolution	0.1 dBmC
	Longitudinal excitation	135 VDC (0 dBm, ±1 dB reproducibility)

Notes

- Subject to change without notice.
- Typical, at 23 °C ± 3 °C, on batteries, with no type B USB connection.
- Specifications based on 24 AWG (PE 0.5 mm) cabling.
- Specification based on 1 kft 24 AWG cabling. Range depends on cable type and condition.
- For double faults only.



GENERAL SPECIFICATIONS

Display	Touchscreen TFT LCD with backlight 152 mm (6 in) diagonal 800 x 480 resolution, WVGA
Test connections	Five-color banana connector for T/A, R/B, G, T1/A1, R1/B1
Results management	> 2 GB internal memory Single and bulk file export to USB memory devices FTP upload
Temperature operating storage	0 °C to 40 °C (32 °F to 104 °F) -20 °C to 60 °C (-4 °F to 140 °F)
Humidity	5 % to 95 % relative, non-condensing
Shock	1 m (39 in) drop per GR-196-CORE
Altitude	3000 m (9842 ft)
Input power	12 VDC, 4.16 A, 48 W via 90-264 VAC adapter or 12 V vehicle adapter
Battery	Internal rechargeable lithium polymer, with battery-state and level indications, adjustable auto-power down
Safety	CE and CSA marked
Size (H x W x D)	254 mm x 124 mm x 62 mm (10 in x 4 ⁷ / ₈ in x 2 ⁷ / ₁₆ in)
Weight (with battery)	1.5 kg (3.3 lb)
Water/dust ingress	Designed to comply with IP54
Differential voltage protection	354 Vrms or 1000 VDC max
Common mode voltage protection	354 Vrms or 1000 VDC
Voltage detection	>20 V will trigger alarm message
Self-test	Routine on power-up
Connectivity	Two USB 2.0 client ports One USB Type B host port Optional WiFi support
Languages	English, French, German, Italian, Polish and Spanish

STANDARD ACCESSORIES

Test cable: Three-color (black, red, green) 4 mm banana plugs terminated with telco clips (ACC-M3COLR), or Three-color (black, red, green) 4 mm banana plugs terminated with 4 mm plugs with crocodile clips (ACC-M4MM)
Certificate of compliance
AC adapter (ACC-48WPS)
Soft carrying case (GP-10-061)

OPTIONAL ACCESSORIES

Copper test cables: Yellow/blue banana connectors to telco clips (ACC-MTCYB) or Yellow/blue banana connectors to 4 mm plugs/croc clips (ACC-M4MMYB)
USB host/client cable (GP-2053)
16 GB USB memory stick (GP-2144)
12 V vehicle charger (ACC-12VLGB)
Form fitting, protective soft glove with shoulder strap (ACC-LGLOVE)
Headset (GP-1002)
2.4 GHz WiFi Pico Adapter (GP-2223)
Teletech TS125 Far-End Device (TS125)
Bluetooth Nano USB Dongle V4.0 + EDR (GP-2260)
RFL strap (ACC-STRP)
High Impedance (Hi-Z) test cable (ACC-HIZ). Requires WBAND software option.
MAX-600 screen protector film (Pkg 2) (GP-2272)



Specifications and descriptions are subject to change without prior notice.

ORDERING INFORMATION

MAX-610-XX-XX

Model

MAX-610 = Copper I&R test set

Platform Options

00 = Without software options

FTPUPLD = Result upload via FTP over WiFi and Ethernet

Copper Software Options

00 = Without software options

FED = Support for Teletch TS125 Far-End Device^aNEXT = Near-end crosstalk^b

RFL = Resistive fault location/K-test option

SBAL = Stressed balance

SMARTR = Pair Detective and Fault Mapper option^c

TDR = Time-domain reflectometry option

WBAND = Extend frequency range from 20 kHz to 35 MHz

HIVOLT = Enables 500V isolation resistance

RLOSS = Return loss to 2.2 MHz option^bADRP = ADSL2+ and VDSL2-17a data rate prediction option^dV35DRP = VDSL2-35b data rate prediction^e

Example: MAX-610-FTPUPLD-TDR-SMARTR

Notes

- Teletch TS125 Far-End Device sold separately.
- Requires the WBAND option.
- Includes TDR option.
- Requires WBAND and TDR option, or WBAND and SmartR™ option.
- Requires ADRP option

EXFO Headquarters > Tel.: +1 418 683-0211 | Toll-free: +1 800 663-3936 (USA and Canada) | Fax: +1 418 683-2170 | info@EXFO.com | www.EXFO.com

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to www.EXFO.com/contact.

EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to www.EXFO.com/specs.

In case of discrepancy, the web version takes precedence over any printed literature.