


Fiber Protection Sleeves

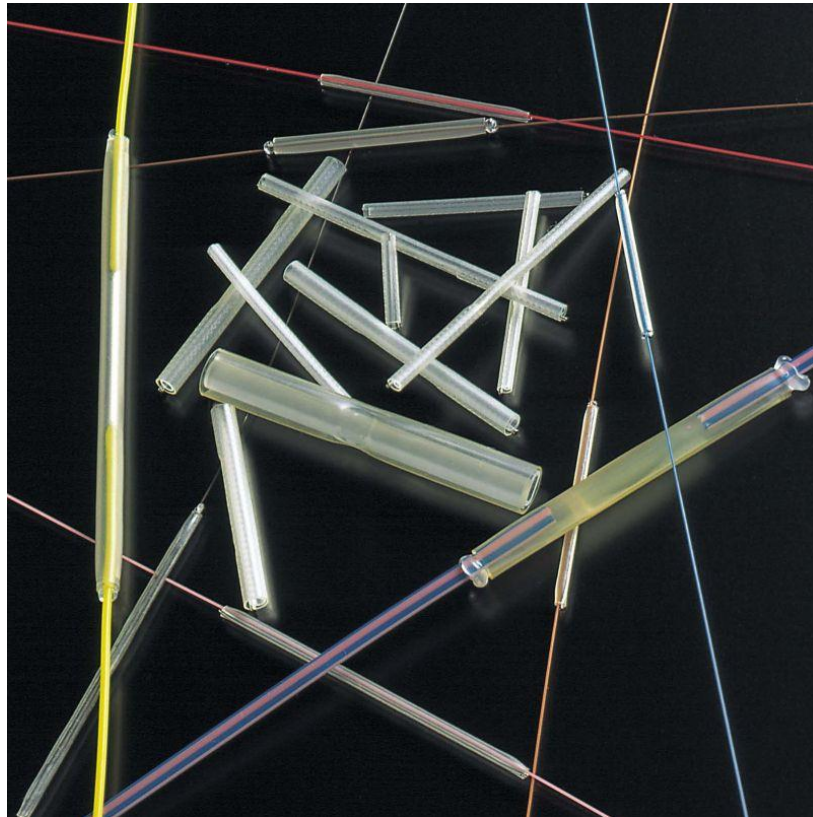

Type Variation

████████████████████
FP-03

████████████████████
FPS01-400-12

████████████████████
FPS01-900-15

████████████████████
FP-03(L=40)

████████████████████
FPS01-400-15

████████████████████
FPS01-900-20

████████████████████
FP-04(T)

████████████████████
FPS01-400-20

████████████████████
FPS01-900-25

████████████████████
FP-05

████████████████████
FPS01-400-25

████████████████████
FPS01-900-34

████████████████████
FPS04-30

████████████████████
FPS01-400-34

████████████████████
FPS01-900-45

████████████████████
FPS08-28

████████████████████
FPS01-400-40


████████████████████
FPS24-40

Full-scale

Specifications and descriptions are subject to change without prior notice.

Specifications

Material	Outer tube	FP-03 series / FPS01 series	Polyolefin based on Polyethylene	
		FP-04(T) / FP-05	Ethylene-Vinyl Acetate	
		FPS04-30 / FPS08-28 / FPS24-40	Polyolefin based on Polyethylene	
	Inner tube		Ethylene-Vinyl Acetate	
	Strength member	FP-03 series / FPS01 series		Stainless steel
		FP-04(T) / FP-05		Heat-resistant glass
FPS04-30/FPS08-28/FPS24-40		Heat-resistant glass		
Operation condition (after shrink)			-10 to 50 deg C, 0 to 95%RH (Non dew)	
Storage condition (before shrink)			-40 to 60 deg C, Non dew	

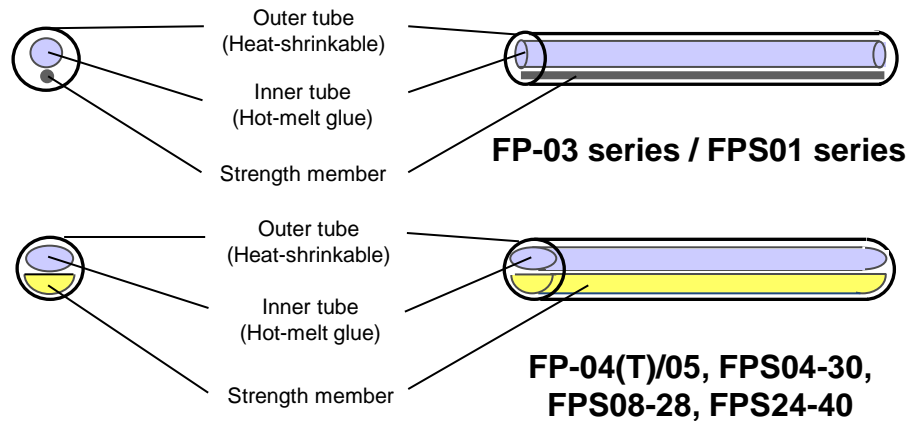

Model	Sleeve length	Strength member length	Diameter after shrink	Fiber count	Recommended cleave length	Coating diameter
FP-03	60mm	60mm	3.1mm	Single	16mm	0.25mm to 0.9mm
FP-03(L=40)	40mm	40mm	3.1mm	Single	10mm	0.25mm to 0.9mm
FP-04(T)	40mm	40mm	4.0mm	1 to 8	10mm	0.25mm (thickness)
FP-05	40mm	40mm	4.5mm x 4.0mm	1 to 12	10mm	0.25mm (thickness)
FPS04-30	30mm	30mm	2.4mm	1 to 4	10mm	0.25mm (thickness)
FPS08-28	28mm	28mm	3.3mm x 2.7mm	1 to 8	10mm	0.25mm (thickness)
FPS24-40	40mm	40mm	8.0mm x 4.0mm	1 to 24	10mm	0.25mm (thickness)
FPS01-400-12	12mm	13mm	1.5mm	Single	4mm	up to 0.4mm
FPS01-400-15	15mm	16mm	1.5mm	Single	5mm	up to 0.4mm
FPS01-400-20	20mm	21mm	1.5mm	Single	8mm	up to 0.4mm
FPS01-400-25	25mm	26mm	1.5mm	Single	10mm	up to 0.4mm
FPS01-400-34	34mm	35mm	1.5mm	Single	15mm	up to 0.4mm
FPS01-400-40	40mm	41mm	1.5mm	Single	16mm	up to 0.4mm
FPS01-900-15	15mm	16mm	2.3mm	Single	4mm	up to 0.9mm
FPS01-900-20	20mm	21mm	2.3mm	Single	6mm	up to 0.9mm
FPS01-900-25	25mm	26mm	2.3mm	Single	6mm	up to 0.9mm
FPS01-900-34	34mm	35mm	2.3mm	Single	13mm	up to 0.9mm
FPS01-900-45	45mm	46mm	2.3mm	Single	16mm	up to 0.9mm

Specifications and descriptions are subject to change without prior notice.